

PROFESSIONAL LANDSCAPING

PRODUCT CATALOG 2025-2026

Qualitative service and extended warranty



We are known for our power tools, but we also have a **wide range** of cleaning, forest and garden tools.

What all these tools have in common is that they are all compatible with the same battery platform. **XGT and LXT are our two main battery platforms.** We are proud of the quality of our products and our service.

But what makes Makita's service so unique?



Fast, local, high quality

At Makita, our aim is to **turn repairs around within 24 to 48 hours.** We can only do that because we don't send our tools abroad. Customers can bring their tool in to an accredited Makita dealer for servicing or repair. If this dealer is a service partner the tool will be repaired on site. Otherwise it will be sent to Makita repair services in Kortenberg. That enables us to work quickly while offering customers the lowest price for high-quality repairs.



Strong communication

We can also be **contacted by phone.** This allows customers to tell us exactly what they need from us so we can provide a personalized response. And we can keep them fully informed about the progress of the repair process.

Service partners can also call us with any issues they may encounter during the repair process. Service partners are **trained by Makita.** This ensures we are able to give the very best support to our resellers and end consumers.



Long life, extended warranty

We produce tools of the **highest quality** and our machines work in an optimal way over time. That's why we are happy to offer an **extended warranty.** Residential customers have a right to a two-year warranty; professional users are given a one-year warranty.

The warranty is extended to three years for tools that are registered with MyMakita. And we are also delighted to repair much older tools, including that impact drill from the 1980s!






XGT 40Vmax

Robust, future-proof battery

The XGT series has been designed down to the smallest detail to maximize performance even under extreme conditions. It is the best choice for demanding users, providing optimum protection against vibrations, water and dust.

When they choose the XGT series users can expect strong performance and next-level safety with double the battery power of the 18V LXT series, electronic innovations and digital communication between charger, battery and tool.

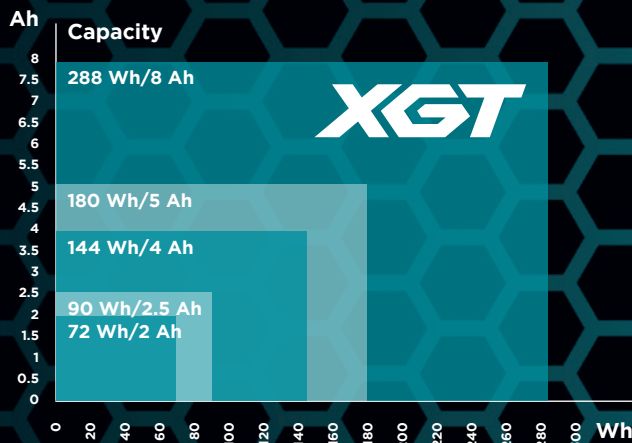

Powerful



The XGT platform combines state-of-the-art tools and cutting-edge batteries to offer ideal solutions for demanding industrial applications.

Intelligent



The ease with which tools and batteries talk to each other on the XGT platform brings efficient power consumption within reach and provides better protection to batteries in extreme conditions.

Reliable



XGT is durable, robust and powerful. The way the platform is put together ensures both tools and batteries are suitable for even the most demanding applications.

Future-focused



XGT is designed for a whole range of applications. There are more than 180 tools in the XGT series and the latest technologies are being added all the time.




LXT 18V

Proven quality for virtually any application

With more than 420 tools to choose from, the 18V LXT series has just about everything anyone could need. There's a tool for every job. As well as 'traditional' cordless tools like drills, grinders and saws, the LXT range also includes a wide selection of garden tools, lighting solutions, and even a coffee machine and a cordless kettle.

Some tools can be powered by two 18V batteries working in tandem to supply more power; the same batteries can also be used for smaller tools.

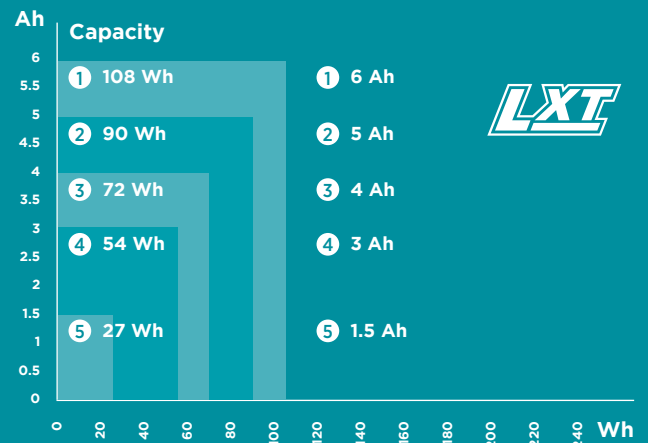

Battery packs

Advantages and types



LESS
NOISE



NO
EXHAUST FUMES



EASY TO
START



LOWER
MAINTENANCE



NO
PETROL MIXTURES



191L29-0
BL4020 Lithium-ion battery
40Vmax • 2.0 Ah
0.69 kg • 22 min*



191B36-3
BL4025 Lithium-ion battery
40Vmax • 2.5 Ah
0.71 kg • 28 min*



191L77-9
BL4040 Lithium-ion battery
40Vmax • 4.0 Ah
1.0 kg • 45 min*



1910N6-8
BL4040F Lithium-ion battery
40Vmax • 4.0 Ah
1.0 kg • 45 min*



191L47-8
BL4050F Lithium-ion battery
40Vmax • 5.0 Ah
1.3 kg • 50 min*



191X65-8
BL4080F Lithium-ion battery
40Vmax • 8.0 Ah
2.0 kg • 80 min*



191E07-8
DC40RA charger
Fast charger for XGT
40Vmax batteries




191N09-8
DC40RB dual port fast charger
Dual port fast charger for charging
two XGT 40Vmax batteries at the same time



191C10-7
ADP10 charger adapter
Adapter for charging LXT 14.4V and 18V
batteries with an XGT 40Vmax charger



*Charging time with fast charger



197280-8
BL1850B 5.0 Ah battery



197422-4
BL1860 6.0 Ah battery



196933-6
DC18RD dual port charger



195584-2
DC18RC charger



196426-3
DC18SF charger



BL6440
4.0 Ah-230.4 Wh battery



BL64100
10 Ah-564.48 Wh battery



DC64WA
64Vmax battery charger



Battery packs

40Vmax

18V

Article		# Batteries	Battery type	Capacity	Charger
191J81-6	✓	2	BL4025	2.5 Ah	DC40RA
191J65-4	Cardboard	1	BL4040	4.0 Ah	DC40RA
191J97-1	✓	2	BL4040	4.0 Ah	DC40RA
191L77-9	Cardboard	2	BL4040	4.0 Ah	DC40RA
191U00-8	✓	2	BL4040	4.0 Ah	DC40RB
191U28-6	✓	4	BL4040	4.0 Ah	DC40RB
191V35-5	✓	2	BL4050F	5.0 Ah	DC40RA
191V6-0	Cardboard	2	BL4050F	5.0 Ah	DC40RA
191U13-9	✓	2	BL4050F	5.0 Ah	DC40RB
191U42-2	✓	4	BL4050F	5.0 Ah	DC40RB
191Y97-1	✓	2	BL4080F	8.0 Ah	DC40RB
197494-9	✓	2	BL1840B	4.0 Ah	DC18RC
197624-2	✓	2	BL1850B	5.0 Ah	DC18RC
197629-2	✓	2	BL1850B	5.0 Ah	DC18RD
197626-8	✓	4	BL1850B	5.0 Ah	DC18RD
198116-4	✓	2	BL1860B	6.0 Ah	DC18RC
198077-8	✓	2	BL1860B	6.0 Ah	DC18RD
198091-4	✓	4	BL1860B	6.0 Ah	DC18RD

BL4040F

Advanced "high performance" battery

XGT 40Vmax Li-ion

NEW

The new advanced BL4040F battery is extremely powerful and at the same time also compact and light.

The new advanced BL4040F battery is extremely powerful and at the same time compact and light.

- **Higher power.** In practice this means for example that the speed of the machine will less likely drop under heavy load.

- **Less heating,** and in extreme situations therefore also less chance of failure due to overheating.

- **Better autonomy** because the energy loss is smaller. You can therefore work longer on a single battery charge.



HIGH POWER




LIGHT AND COMPACT



BETTER AUTONOMY



LESS HEATING

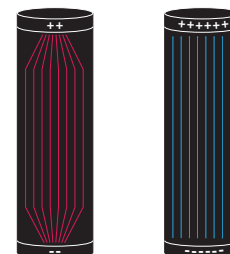

By using Li-ion cells with a unique chemical composition and a "tab-less" structure, BL4040F has an exceptionally low internal resistance.

Specific applications

The BL4040F is an excellent choice when high peak power is required and at the same time the battery should be as light and compact as possible. Typical examples include angle grinders, rotary hammers, circular saws, and (top handle) chain saws.



	BL4040	BL4040F	BL4050F
Reference	191B26-6	1910N6-8	191L47-8
Energy capacity	144 Wh	144 Wh	180 Wh
Peak power *	1,5 kW	2,1 kW	2,2 kW
Weight	1,0 kg	1,0 kg	1,3 kg

* The maximum power that can be delivered for 3 min.

Charging station BCC01

Efficiently charge multiple batteries

- The BCC01 can charge up to 8 batteries automatically. Four batteries are charged simultaneously after which it automatically switches to the next row.
- 40Vmax batteries fit directly and 14.4/18V batteries can also be charged via the optional ADP10 adapter.
- The charging station has the dimensions of a Makpac IV and can be stacked like other Makpacs and also fits on a trolley.
- The charger (DC4002) is connected externally to the station.



Reference	1914U3-7
Charging current per battery	1,6 A (XGT) / 2,1 A (LXT)
Charging time BL4040(F) for 4/8 batteries	145 min / 290 min
Charging time BL4050F for 4/8 batteries	175 min / 350 min
Charging time BL4080F for 4/8 batteries	280 min / 560 min



The batteries are charged sequentially, row after row



The handles can be folded open to an angle of 135°.



The BCC01 fits other Makpacs and also fits the trolley.



The charging status is indicated for each battery.




The charging station can be stored in different positions.

PDC01 - PDC1200 - PDC1500



Makita's portable battery pack platform


Connecting PDC with standard connector




UB001C
UB003C



VR00xC
Concrete vibrator



UR101C



PDC1200
1206 Wh




Attaching PDC to the tool

LM001C



UB002C/UB004C



BAC01



The BAC01 in combination with PDC supplies 230V AC on site.

PDC01
432 Wh max.



PDC1500
1567,8 Wh



PDC connection with LXT/XGT tools

18V LXT*



2x18V LXT



40Vmax XGT



18V LITHIUM-ION



191J50-7
Adapter 18V LXT*

18V 18V 36V



191J51-5
Adapter 2x18V LXT

XGT 40Vmax



191N62-4
Adapter 40Vmax XGT



The PDC01 unit can hold 1-4 LXT batteries.



The battery unit can also be used without the harness.



DC4001 (191L00-4) battery charger for PDC1200 and PDC1500.

*18V LXT only in combination with PDC01



	PDC01			PDC1200	PDC1500
Reference	191A64-2	191A59-5	191C50-5	BEAPDC1200A01	EUAPDC1500A01
Battery	1-4 LXT batteries	1-4 LXT batteries	1-4 LXT batteries	Integrated	Integrated
Energy capacity	Max 432 Wh	Max 432 Wh	Max 432 Wh	1206 Wh	1567,8 Wh
Included adapters	2x18V (191J51-5)	18V (191J50-7) - 2x18V (191J51-5)	18V (191J50-7) - 2x18V (191J51-5)	2x18V (191J51-5)	-
Included batteries	-	-	4x5.0 Ah	Integrated	Integrated
Included charger	-	-	DC18RD	DC4001	DC4001
Net weight	4.0 kg	4.0 kg	4.0 kg	8.8 kg	10.9 kg
Weight incl. battery and harness	7.0 kg	7.0 kg	7.0 kg	10.4 kg	12.9 kg

BAC01 for PDC (battery pack)

Power converter

Charge your batteries and use your preferred 230V tools anywhere without mains power

- Should be powered by PDC1500, PDC1200 or PDC01.
- Converts 36V DC from the PDC into 230V AC.
- Two 230V outputs with 50/60 Hz frequency setting.
- Maximum continuous power of 1400W (VA) and peak power to 2800W (VA) (only with PDC1200/PDC1500).
- The high-grade electronics produces an AV with purer sine waveform.
- Protected from overload and overheating.
- Ideal for electric tools where there is no access to mains power, for outdoor applications and as backup power.



Combination with PDC01
(art. no. BAC01PDC01BE)



Combination with PDC1200
(art. no. BAC01PDC1200BE)



Large display with clear information about current power use.



Purer sine waveform for output voltage, safe for sensitive equipment.



Several USB ports for charging mobile devices.



Has a 12V DC cigar socket.

	BAC01
AC output voltage	230V 50/60Hz
Input voltage	36V DC
Max continuous power with PDC1500/PDC1200	1400W (VA)
Max continuous power with PDC01	750W (VA)
Peak power (4 s)	2800W (VA)
DC outputs	2x USB-A 2x USB-C 1x12V DC
Run time with PDC01, 4x BL1850 and 750W (VA) power	± 16 min
Run time with PDC1200 and 1000W (VA) power	± 56 min
Weight	7.3-16.2kg



Handles can be folded out for carrying.



Can be mounted on a Makpac and compatible with the trolley.

Cordless tools

Lawn mowers

LM004J

64Vmax BL MOTOR SOFT NOLOAD XPT



530 mm
Cutting width



20 - 100 mm
Cutting height



70 l
Grass box capacity



Self-propelled speed
1.5 - 6.5 km/h



Mulching



Rear discharge

LM004JB101 charger and 4.0 Ah battery included



Recommended battery
BL6440

This tool uses a 64Vmax battery, which supplies very high power and a long run time



Recommended surface area
max 3800m²



Steel deck

LM001C

64Vmax BL MOTOR SOFT NOLOAD XPT



530 mm
Cutting width



20 - 100 mm
Cutting height



70 l
Grass box capacity



Self-propelled speed
2.5 - 5.0 km/h



Mulching



Side discharge



Rear discharge

LM001CZ portable power pack not included



Recommended battery
PDC1200



PDC1200
6900m² - Push-drive
5100m² - Self-propelled

Portable power pack:
PDC1200



Ø 230 mm large front and rear wheels



Control panel

Steel deck

LM002G

40Vmax BL MOTOR SOFT NOLOAD XPT



530 mm
Cutting width



20 - 100 mm
Cutting height



70 l
Grass box capacity



Self-propelled speed
1.5 - 5.0 km/h



Mulching



Rear discharge

LM002GZ charger and battery not included



Recommended battery
BL4080F



Recommended surface area
1700-2000m²



Variable speed control lever

Two XGT batteries can be connected for longer run time

BL motor with outer rotor, optimized for lawn mowers

Ø 230 mm large front and rear wheels



Steel deck



Watch the video

Brush cutters

UR012G

XGT **40V max** **80V max** **AFT** **ADT** **BL** **MOTOR** **XPT**



Cutting width



Max output



Reverse rotation



Speed settings



Variable speed

UR012GZ06 charger and battery not included



Recommended battery
BL4050F



UR013G

XGT **40V max** **80V max** **AFT** **BL** **MOTOR**



Cutting width



Max output



Reverse rotation



Variable speed

UR013GZ04 charger and battery not included



Recommended battery
BL4050F



UR101C

AFT **ADT** **BL** **MOTOR** **XPT**



Cutting width



Max output



Reverse rotation



Speed settings



Variable speed

UR101CZ charger and battery not included



Recommended battery
PDC1200

Compatible with
PDC1200 - PDC1500





Cordless tools

Hedge trimmers

CURVED PROFILE

Optimum blade shape for smooth cutting of thin branches

Very sharp blade edges thanks to the curved shape of the teeth, which only meet at the tip.

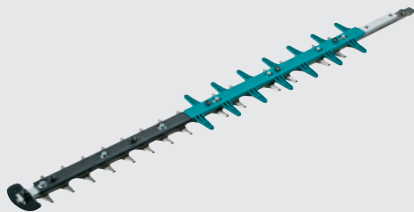

THREE SHARPENED EDGES

Optimum for rough cutting of thick branches

The blade has three very sharp edges to ensure a clean cut and minimal damage to the branch.



ASYMMETRICAL TEETH

Innovative tooth shape

The asymmetrical shape of the teeth ensures branches remain tightly gripped during cutting.



TRIMMING

UH004G | UH005G



Max branch diameter



Run time*

600/750 mm

Blade length
UH004G / UH005G



Speed settings

UH004GZ charger and battery not included

UH004GM201 charger and 2x 4.0 Ah battery included

UH005GZ charger and battery not included

UH005GM201 charger and 2x 4.0 Ah battery included



Recommended battery
BL4040

*Approximate, maximum speed, no load

ROUGH CUTTING

UH006G | UH007G

XGT **40Vmax** **BL MOTOR** **XPT**



Max branch diameter



Run time*

600/750 mm

Blade length
UH006G / UH007G



Speed settings

UH006GZ charger and battery not included

UH006GM201 charger and 2x 4.0 Ah battery included

UH007GZ charger and battery not included

UH007GM201 charger and 2x 4.0 Ah battery included

Recommended battery
BL4040



5-position rotary handle



Control panel



Blade length
600 mm

UH006G

TRIMMING

UH013G | UH014G

XGT **40Vmax** **BL MOTOR** **XPT**



Max branch diameter



Reverse rotation



Speed settings



Run time*

UH013GZ charger and battery not included

UH013GM101 charger and 4.0 Ah battery included


UH014GZ charger and battery not included

UH014GM101 charger and 4.0 Ah battery included



Recommended battery
BL4040

*Approximate, maximum speed, no load

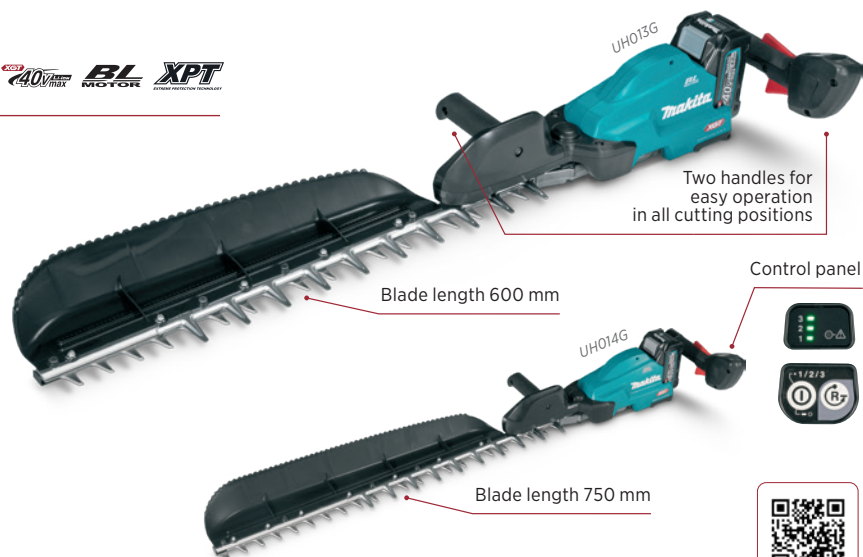

Blade length 600 mm

Blade length 750 mm

UH013G

UH014G

Two handles for easy operation in all cutting positions

Control panel



Watch the video

Pole hedge trimmer

ROUGH
CUTTING

UN001G

XGT

40Vmax

BL
MOTOR

XPT

B
25 mm

Max branch
diameter

XGT
4Ah
65 min

Run time*

600 mm

Blade length

R

Reverse
rotation

3

Speed settings

UN001GZ charger and battery not included



**Recommended
battery**
BL4040

Two-sided blade with
sharp triangular teeth

*Approximate, maximum speed, no load

Three speeds for
optimum control

Tiltable head: 45° upwards /
70° downwards / 180° for carrying

Ideal for trimming
thick branches

Sturdy and
well-balanced



Watch the video



Sturdy and well-balanced



Powerful



Cordless tools

Blowers

UB004C

 19,7 m³/min

Max air volume

 25 N

Blowing force

 Variable speed

Variable speed

 4

Max speed

 PDC 55 min

Run time*

UB004CZ charger and battery not included



Recommended battery
PDC1500

Very comfortable harness



Telescopic blowing tube

Variable speed with cruise control



Watch the video

*Approximation, PDC1500 and maximum power

UB003C

 24 m³/min

Max air volume

 24 N

Blowing force

 Variable speed

Variable speed

 4

Max speed

 PDC 60 min

Run time*

UB003CZ charger and battery not included



Recommended battery
PDC1500

Highly efficient in combination with PDC1500

High air speed



Watch the video

*Approximation, PDC1200 and maximum power

UB001G

 16 m³/min

Max air volume

 20 N

Blowing force

 Variable speed

Variable speed

 XGT 5Ah 15 min

Run time*

UB001GZ charger and battery not included

UB001GM101 charger and 4.0 Ah battery included



Recommended battery
BL4050F



Variable trigger speed control, with cruise control lever for lock-on operation



ON/OFF switch



3-stage telescopic nozzle



Watch the video

*Approximation, maximum power

Chainsaws

UC024G

XGT **40V** **BL MOTOR** **XPT**

				
1,5 kW	1,1 mm	0,325"	200 ml	
Max output	Chain gauge	Chain pitch	Chain oil tank volume	Captive nuts

UC024GZ charger and battery not included



Recommended battery
BL4050F

Safety switch

Excellent balance

Chain bar length 300 mm



Watch the video

UC025G

XGT **40V** **BL MOTOR** **XPT**

				
1,5 kW	1,1 mm	0,325"	200 ml	
Max output	Chain gauge	Chain pitch	Chain oil tank volume	Captive nuts

UC025GZ charger and battery not included



Recommended battery
BL4050F

Safety switch

Excellent balance

Chain bar length 350 mm



Watch the video



Cordless tools

Top Handle Pruning Chainsaws

UC002G

-  1,4 kW
Max output
-  1,1 mm
Chain gauge
-  3/8"
Chain pitch
-  200 ml
Chain oil tank volume
- 
Captive nuts

UC002GZ charger and battery not included

UC002GM101 charger and 4.0 Ah battery included



Recommended battery
BL4040F

Hanging D-ring



Chain bar length 250 mm

UC003G | UC004G

-  1,4 kW
Max output
-  1,1 mm
Chain gauge
-  3/8"
Chain pitch
-  200 ml
Chain oil tank volume
- 
Captive nuts

UC003GZ charger and battery not included

UC003GM101 charger and 4.0 Ah battery included

UC004GZ charger and battery not included

UC004GM101 charger and 4.0 Ah battery included



Recommended battery
BL4040F



Captive nuts prevent nut loss



Chain bar length
UC003G: 300 mm
UC004G: 350 mm



Easy handling



Pole chainsaw

UA004G **XGT** **40V** **AFT** **BL** **XPT**



1,5 kW

Max output



300 mm

Guide bar length



1,1 mm

Chain gauge



3/8"

Chain pitch



Captive nuts



160 ml

Chain oil tank volume

UA004GZ charger and battery not included



Recommended battery
BL4040F



Watch the video

Slim saw head
Chain bar length 300 mm

Integrated hook for removing cut branches

2516-3748 mm

Telescopic pole

High power



Cordless tools

Earth auger


DG002G **XGT** **40Vmax** **ADT** **BL** **MOTOR** **XPT**



DG002GZ charger and battery not included



**Recommended
battery**
BL4040

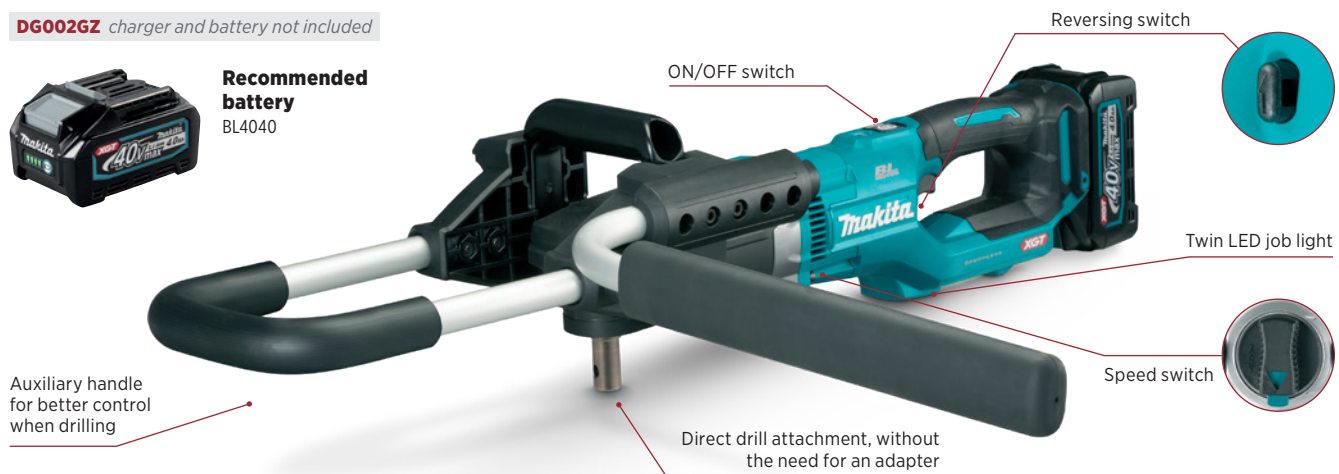

Model	Shank type	Part No.	Item	Diameter	Length	Working length	Spare blades
DG002G	Direct attachment of a drill or extension without the need for an adapter	E-13611	Drill bit	ø 50 mm	800 mm	550 mm	E-13649
		E-13627		ø 60 mm			E-13655
		E-13633		ø 80 mm			E-13661
		E-07294		ø 100 mm			E-07630
		E-07303		ø 150 mm			E-07646
		E-07319		ø 200 mm			E-07652
	Extension bar	E-07325	Extension bar	-	540 mm	-	-
	Pin	E-07331	Pin	-	-	-	-

Sharp blade
Designed for drilling into stony ground



**Holes
for greenhouses,
fences**

for planting

High pressure washer

HW001G **XGT** **40V** **BL MOTOR** **XPT**



85 bar
Pressure



5,5 l/min
Water flow



5 m
Hose length



Self-priming
function



18 min
Run time*



Speed settings

Handle can be shortened
from 520 to 920 mm for carrying
and storage convenience

HW001GZ charger and battery not included



**Recommended
battery**
BL4050F

*Approximation, maximum power with two batteries

3 pressure settings:
30 bar for light washing
55 bar for washing vehicles, farm equipment, etc.
85 bar for washing facades, etc.



Watch the video



Water can be supplied
from faucet or reservoirs

Large 140 mm wheels



Cordless tools

Combi-system

UX01G

XGT **40V** **AFT** **BL** **XPT**



Speed settings



Max output




Reverse rotation

UX01GZ Motor only charger and battery not included

UX01GZ01 Motor (charger and battery not included) incl. brushcutter accessory EM404MP



Recommended battery
BL4040

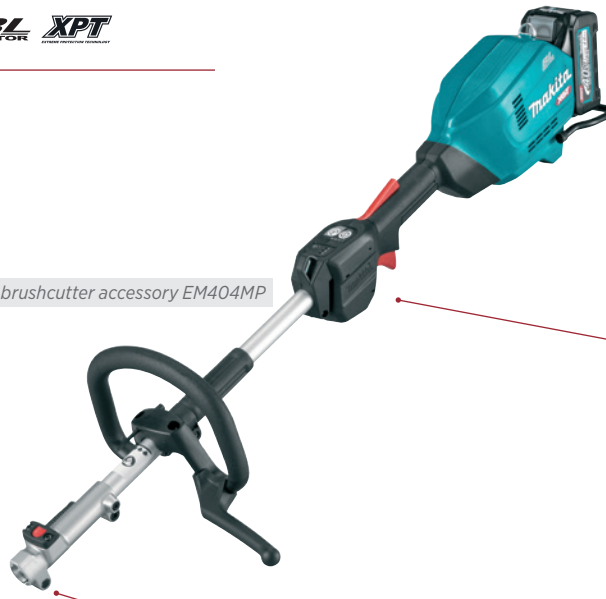

Control panel



Watch the video

Quick toolless attachment connection system

Optional attachments

	EM407MP Rotary scissors 191M56-3		KR401MP Cultivator 199181-6		EE400MP Edger 196752-0		196745-7 Blade for EE400MP
	WA400MP Weeding 1913P8-6		1913L5-4 220 mm blade for WA400MP		1913L6-2 80 mm blade for WA400MP		1913L7-0 170 mm blade for WA400MP
	EN424MP Ground trimmer 1913C9-3		PF400MP Pump PF400MP		EM408MP Grass trimmer 191N39-9		EN422MP Ground trimmer 25 cm Angle adjustment 1912T0-4
	SN400MP Snow accessory EUASN400MP		EN402MP Hedge trimmer 50 cm Angle adjustment 1912T8-8		EN401MP Hedge trimmer 49 cm Angle adjustment 196256-2		EN410MP Hedge trimmer Straight 197726-4
	EY403MP Pole saw 191T38-7		UB401MP Blower Low noise 191P72-3		UB402MP Blower 1912R8-4		BR400MP Power brush 199318-5
	SW400MP Power sweep 199339-7		1912V6-6 Shear blade set for EN424MP		LE400MP Shaft extension 1080 mm 191E24-8		EM404MP Brush cutter attachment 198768-1

Work lights

ML010G

XGT **40V MAX** **LXT** **XPT** **DC AC**



5.500 lm



25 lx



Lightning modes



Light diffusing option

EUAML010G charger and battery not included



Recommended battery
BL4080F



Watch the video

Up to 8 of these work lights can be linked together

The self-righting design ensures it won't fall over if knocked.



ML005G

XGT **40V MAX** **LXT** **18V LITHIUM-ION**



3.600 lm



2.100 lx



Lightning modes



Light diffusing option

DEAML005G charger and battery not included



Recommended battery
BL4050F

Can be tilted from -30° to 210°



ML009G

XGT **40V MAX** **LXT** **18V LITHIUM-ION**



10.000 lm



150 lx



Lightning modes



Light diffusing option

DEAML009G charger and battery not included



Recommended battery
BL4050F

240° angle adjustment



Cordless tools

Blower/vacuum

AS001G



2.8 N

Blowing force



Speed modes



Run time
(Max - min power)

AS001GZ charger and battery not included



Recommended battery
BL4040

Easy toolless
nozzle replacement

Control panel

Hanging hole

Air intake with
filter can be used
for deflating with
optional accessory
191X23-4

Lock-on switch



Watch the video



Heavy duty



Power cutters

CE003G

XGT **40V** **AFT** **BL** **MOTOR** **XPT**



230 mm



88 mm



6.600 RPM



Electric brake



Soft start

Wheel diameter

Cutting depth

No load speed

Electric brake

Soft start

CE003GZ02 charger and battery not included



Recommended battery
BL4080F



Watch the video

With water supply kit



Compact and responsive

CE004G

XGT **40V** **AFT** **BL** **MOTOR** **XPT**



305 mm



121 mm



5.500 RPM



Electric brake



Soft start

Wheel diameter

Cutting depth

No load speed

Electric brake

Soft start

CE004GZ charger and battery not included



Recommended battery
BL4080F



Watch the video

With water supply kit



Compact and responsive

CE001G

XGT **40V** **AFT** **BL** **MOTOR** **XPT**



355 mm



127 mm



5.300 RPM



Electric brake



Soft start

Wheel diameter

Cutting depth

No load speed

Electric brake

Soft start

CE001GZ charger and battery not included



Recommended battery
BL4080F



Watch the video

With water supply kit



Cordless tools

Cooler and warmer box

CW001G



-18 °C

Cooling capacity



60 °C

Heating capacity



5v/2,4A

USB-A



DC 12 v

AC adapter available



Large 20 l capacity

CW001GZ01 battery and charger not included



Recommended battery
BL4050F

7 cooling settings
-18, -15, -10, -5, 0, 5 and 10°C.
7 heating settings
30, 35, 40, 45, 50, 55 and 60°C

CW003G



-18 °C

Cooling capacity



60 °C

Heating capacity



5v/2,4A

USB-A



DC 12 v

AC adapter available



7 l capacity

CW003GZ battery and charger not included



Recommended battery
BL4050F

7 cooling settings
-18, -15, -10, -5, 0, 5 and 10°C.
7 heating settings
30, 35, 40, 45, 50, 55 and 60°C



Watch the video

CW004G



-18 °C

Cooling capacity



60 °C

Heating capacity



5v/2,4A

USB-A



DC 12 v

AC adapter available



Large 29 l capacity

CW004GZ battery and charger not included



Recommended battery
BL4050F



Watch the video

Two adjustable temperature zones

CW002G



-18 °C

Cooling capacity



60 °C

Heating capacity



5v/2,4A

USB-A



DC 12 v

AC adapter available

Large 50 l capacity



CW002GZ01 battery and charger not included



Recommended battery
BL4050F



Radio – fan

MR004GZ


DAB/DAB+


FM


5V/2,4A
USB-A


AUX

MR004GZ charger and battery not included, power adapter included

Built-in FM antenna in the carrying handle



CF002GZ


330 mm
Diameter


4 m/sec
Air speed


4Ah
▲ 5 h
Run time


timer
Timer function

CF002GZ charger and battery not included, power adapter included

Tiltable: 90° upwards /
45° downwards

With swivel function,
45° left, 45° right



*At maximum power





One battery
Countless solutions



Get in touch
www.makita.be



Makita[®]