

Makita[®]

PROFESSIONAL OUTDOOR POWER EQUIPMENT

2025



Training, Service, Repair and Warranty



 **BOOK YOUR TRAINING COURSE**
makitauk.com/training




Fast, local, high quality

At Makita, we strive to complete quality repairs in an efficient and timely manner because as possible because we keep all repairs local rather than sending tools abroad. Customers can bring their tools to any local authorised Makita service agent or to our official Makita Factory Service centres located in Milton Keynes, London, Wigan or Glasgow. This streamlined process allows us to provide fast, high-quality repairs at the most competitive prices.



Long life, extended warranty

We take pride in producing tools of the highest quality, designed to deliver reliable performance over time. To demonstrate our confidence in their durability, we are pleased to offer an extended warranty. Every customer is entitled to a standard one-year warranty. By registering your tool online at www.makitauk.com, this warranty can be extended to three years at no extra cost.

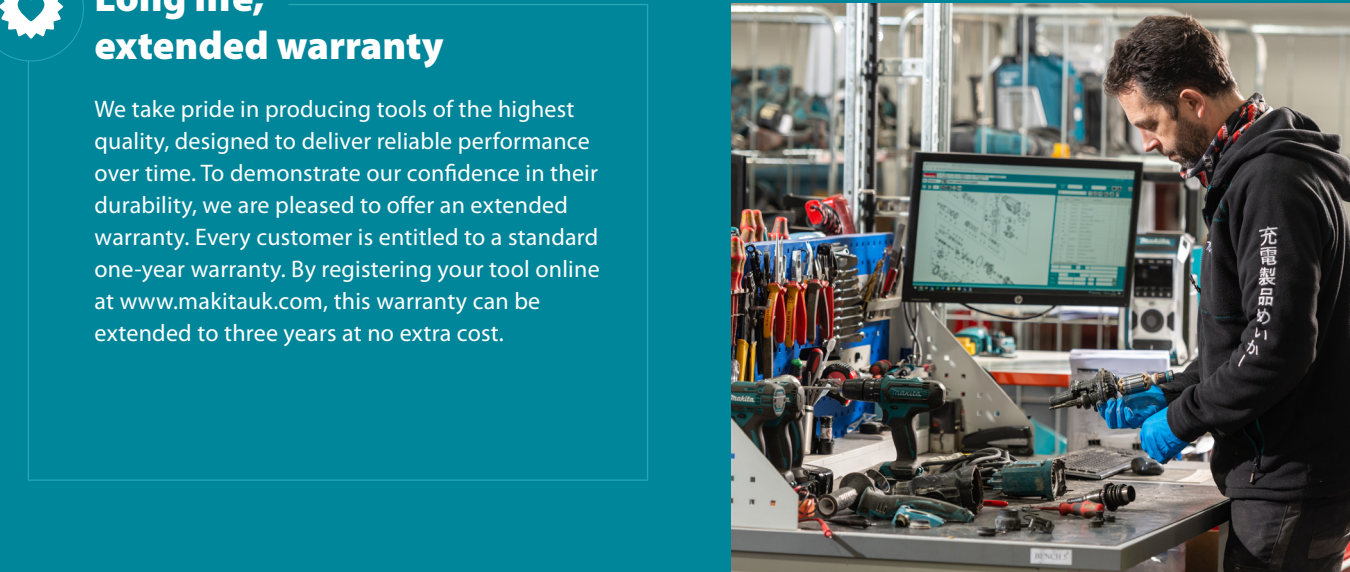

Makita have a dedicated **Training Team** with facilities for all your training requirements. **Located in Glasgow, London, Wigan or at our head office in Milton Keynes.**

We offer a wide range of modules/courses aimed at Makita's Tool range including courses **accredited by City & Guilds.**

Information on all the modules/courses we offer are available on our website, alternatively, if you seek any other details please feel free to contact us: **training@makitauk.com / 01908 211678**

We are known for our power tools, but we also have a **wide range** of cleaning, forest, landscaping and ground maintenance products.

Our tools will run off either the **40V Max XGT or 18V LXT battery platforms.** We are proud of our products quality and service.

But what makes Makita's service so unique?



Strong communication

We're also available by phone and email allowing customers to share their specific needs so we can deliver personalised support. We keep customers fully informed about the progress of their repair process.

Our authorised service partners are welcome to contact us with any challenges they face during repairs. Trained by Makita, these partners are equipped to provide exceptional service, ensuring the best possible support.




XGT 40V Max

Powerful, Robust and Future-Proof Platform

The XGT series is meticulously engineered to deliver exceptional performance, even in the most extreme conditions. It's the ultimate choice for demanding users, offering unparalleled protection against vibrations, water, and dust.

By choosing the XGT series, users gain access to powerful performance and advanced safety features. With double the battery power of the 18V LXT series, cutting-edge electronic innovations, and seamless digital communication between the charger, battery, and tool, the XGT series takes efficiency and reliability to the next level.

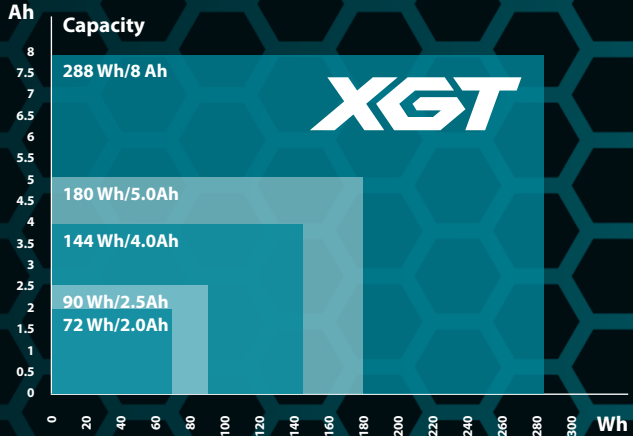

Powerful

The XGT platform combines state-of-the-art tools and cutting-edge batteries to offer ideal solutions for demanding industrial applications.



Intelligent

The ease with which tools and batteries talk to each other on the XGT platform brings efficient power consumption within reach and provides better protection to batteries in extreme conditions.



Reliable

XGT is durable, robust and powerful. The way the platform is put together ensures both tools and batteries are suitable for even the most demanding applications.



Future-Focused

XGT is designed for a whole range of applications. There are more than 180 tools in the XGT series and the latest technologies are being added all the time.




LXT 18V

Proven Quality for Virtually any Application

With over 460 tools to choose from, the 18V LXT series has everything you need to tackle any task. From essential cordless tools like drills, grinders, and saws to an extensive range of garden tools, lighting solutions, and even a cordless kettle, the LXT range truly has it all.

Some tools in the series are powered by two 18V batteries working together to deliver 36V power, while the same batteries can seamlessly power smaller tools, offering unmatched versatility.

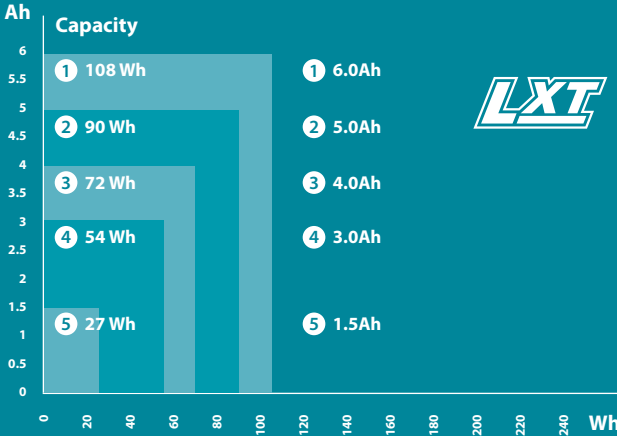

Batteries

Advantages and Types



LOW NOISE



NO EXHAUST FUMES



EASY TO START



LOW MAINTENANCE



NO FUEL MIXING



40V Max / 80Vmax

191L29-0
BL4020 Battery
40V Max • 2.0Ah
0.69 kg • 22 min*



191B36-3
BL4025 Battery
40V Max • 2.5Ah
0.71 kg • 28 min*



191L77-9
BL4040 Battery
40V Max • 4.0Ah
1.0 kg • 45 min*



1910N6-8
BL4040F Battery
40V Max • 4.0Ah
1.0 kg • 45 min*



191L47-8
BL4050F Battery
40V Max • 5.0Ah
1.3 kg • 50 min*



191X65-8
BL4080F Battery
40V Max • 8.0Ah
2.0 kg • 80 min*



191E07-8
DC40RA Charger
Fast charger for XGT 40V Max batteries



191N09-8
DC40RB Twin Port Fast Charger
Twin port fast charger for charging two XGT 40V Max batteries at the same time



191C10-7
ADP10 Charger Adapter
Adapter for charging LXT 14.4V and 18V batteries with an XGT 40V Max charger



*Charging time with fast charger



18V/
2x18V

197280-8
BL1850B 5.0Ah Battery



197422-4
BL1860 6.0Ah Battery



196933-6
DC18RD Twin Port Charger



195584-2
DC18RC Charger



196426-3
DC18SF Charger



BL6440
4.0Ah Battery



BL64100
10.0Ah Battery



DC64WA
64V Max Charger



Power Source Kits	Part Number	MAKPAC	Batteries Qty	Battery Type	Battery Capacity	Charger
40V Max	191J81-6	✓	2	BL4025	2.5Ah	DC40RA
	191J65-4	Cardboard	1	BL4040	4.0Ah	DC40RA
	191J97-1	✓	2	BL4040	4.0Ah	DC40RA
	191L77-9	Cardboard	2	BL4040	4.0Ah	DC40RA
	191U00-8	✓	2	BL4040	4.0Ah	DC40RB
	191U28-6	✓	4	BL4040	4.0Ah	DC40RB
	191V35-5	✓	2	BL4050F	5.0Ah	DC40RA
	1911V6-0	Cardboard	2	BL4050F	5.0Ah	DC40RA
	191U13-9	✓	2	BL4050F	5.0Ah	DC40RB
	191U42-2	✓	4	BL4050F	5.0Ah	DC40RB
18V	191Y97-1	✓	2	BL4080F	8.0Ah	DC40RB
	197494-9	✓	2	BL1840B	4.0Ah	DC18RC
	197624-2	✓	2	BL1850B	5.0Ah	DC18RC
	197629-2	✓	2	BL1850B	5.0Ah	DC18RD
	197626-8	✓	4	BL1850B	5.0Ah	DC18RD
	198116-4	✓	2	BL1860B	6.0Ah	DC18RC
	198077-8	✓	2	BL1860B	6.0Ah	DC18RD
	198091-4	✓	4	BL1860B	6.0Ah	DC18RD

BL4040F

New 40V 4.0Ah High Performance Battery



NEW



35% MORE RUN-TIME




HIGH POWER



LESS HEAT



LIGHT & COMPACT

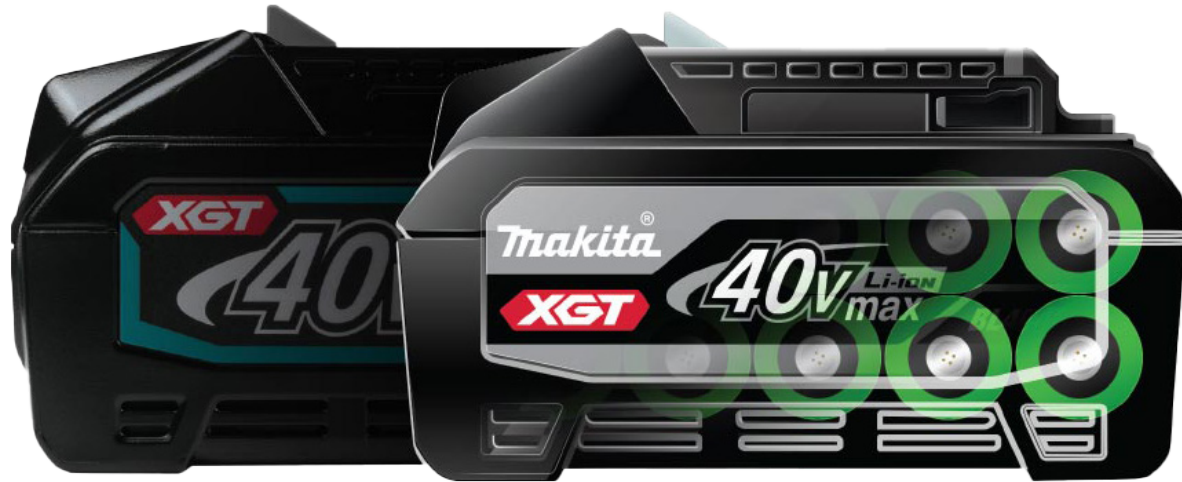

The new advanced BL4040F battery is extremely powerful and at the same time also compact and light.

The new advanced BL4040F battery is extremely powerful and at the same time compact and light.


Higher Power: The speed of the machine will not drop under a heavy workload.

Less Heat: In high workload situations there will be less chance of failure due to overheating.


35% Longer Run-Time: The energy loss is low allowing you to work longer on a single battery charge.

Specific applications

The BL4040F is an ideal solution for scenarios requiring high peak power while maintaining a lightweight and compact design. It is particularly well-suited for demanding tools such as angle grinders, rotary hammers, circular saws, and top-handle chainsaws.

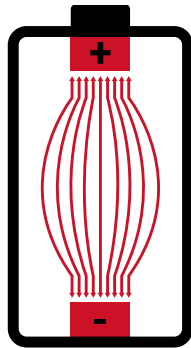


TABBED

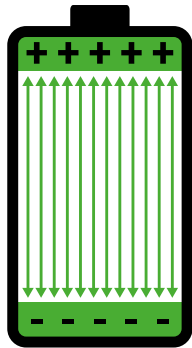

TABLESS

By using Li-ion cells with a unique chemical composition and a TABLESS structure, BL4040F has an exceptionally low internal resistance.

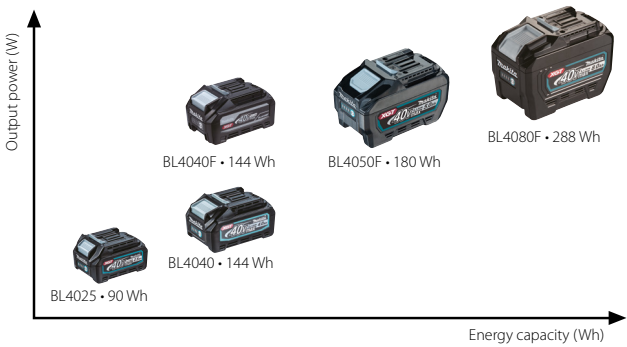

	BL4040	BL4040F	BL4050F
Part Number	191B26-6	1910N6-8	191L47-8
Energy Capacity	144 Wh	144 Wh	180 Wh
Peak Power *	1.5 kW	2.1 kW	2.2 kW
Weight	1.0 kg	1.0 kg	1.3 kg
Charge Time	45 Minutes	45 Minutes	50 Minutes

* The maximum power that can be delivered for 3 minutes.

PDC01 - PDC1200 - PDC1500



Portable Power Supply Battery

Connecting PDC with standard connector



Attaching PDC to the tool



PDC connection with LXT/XGT tools



The PDC01 unit can hold 1-4 LXT batteries.



Watch the video



The battery unit can also be used without the harness.



DC4001 (191L00-4) battery charger for PDC1200 and PDC1500.

	PDC01		PDC1200	PDC1500	
Reference	191A64-2	191A59-5	191C50-5	BEAPDC1200A01	EUAPDC1500A01
Battery	1-4 LXT batteries	1-4 LXT batteries	1-4 LXT batteries	Integrated	Integrated
Energy capacity	Max 432 Wh	Max 432 Wh	Max 432 Wh	1206 Wh	1567.8 Wh
Included adapters	2x18V (191J51-5)	18V (191J50-7) - 2x18V (191J51-5)	18V (191J50-7) - 2x18V (191J51-5)	2x18V (191J51-5)	-
Included batteries	-	-	4x5.0Ah	Integrated	Integrated
Included charger	-	-	DC18RD	DC4001	DC4001
Net weight	4.0 kg	4.0 kg	4.0 kg	8.8 kg	10.9 kg
Weight incl. battery and harness	7.0 kg	7.0 kg	7.0 kg	10.4 kg	12.9 kg

BAC01 for PDC Batteries

Power Converter

Charge your batteries and use your 240V tools anywhere without mains power

- Powered by the PDC1500, PDC1200 or PDC01.
- Converts 36V DC from the PDC into 240V AC.
- Two 240V outputs with 50/60 Hz frequency setting.
- Maximum continuous power of 1400W (VA) and peak power to 2800W (VA) (only with PDC1200 & PDC1500).
- The high-grade electronics produces an AV with purer sine waveform.
- Protected from overload and overheating.
- Ideal for electric tools where there is no access to mains power, for outdoor applications and as backup power.



With the PDC01 battery



With the PDC1200 battery



Large display with clear information about current power use.



Purer sine waveform for output voltage, safe for sensitive equipment.



Several USB ports for charging mobile devices.



Has a 12V DC car socket

	BAC01
AC output voltage	240V 50/60Hz
Input voltage	36V DC
Max continuous power with PDC1500/PDC1200	1400W (VA)
Max continuous power with PDC01	750W (VA)
Peak power (4 s)	2800W (VA)
DC outputs	2x USB-A 2x USB-C 1x12V DC
Run time with PDC01, 4x BL1850 and 750W (VA) power	± 16 min
Run time with PDC1200 and 1000W (VA) power	± 56 min
Weight	7.3-16.2kg



Handles can be folded out for carrying.



Can be mounted on a Makpac and compatible with the trolley.

Cordless Tools

Lawnmowers

LM004J

64Vmax BL MOTOR SOFT NOLOAD

- 530 mm Cutting width
- 20 - 100 mm Cutting height
- 70 l Grass box capacity
- Self-propelled speed 1.5 - 6.5 km/h
- Mulching
- Rear discharge

LM004JM101 charger and 4.0Ah battery included



Recommended battery
BL6440

Recommended surface area
max 3800m²

This tool uses a 64Vmax battery, which supplies very high power and a long run time



Steel deck

LM001C

CONNECTX BL MOTOR SOFT NOLOAD

- 530 mm Cutting width
- 20 - 100 mm Cutting height
- 70 l Grass box capacity
- Self-propelled speed 2.5 - 5.0 km/h
- Mulching
- Side discharge
- Rear discharge

LM001CZ portable power pack not included



Recommended battery
PDC1200

PDC1200
6900m² - Push-drive
5100m² - Self-propelled

Portable power pack: PDC1200



Ø 230 mm large front and rear wheels



Control panel

Steel deck

LM002G

40Vmax BL MOTOR SOFT NOLOAD

- 530 mm Cutting width
- 20 - 100 mm Cutting height
- 70 l Grass box capacity
- Self-propelled speed 1.5 - 5.0 km/h
- Mulching
- Rear discharge

LM002GZ charger and battery not included



Recommended battery
BL4080F

Recommended surface area
1700-2000m²

Two XGT batteries can be connected for longer run time

BL motor with outer rotor, optimized for lawn mowers

Ø 230 mm large front and rear wheels

Steel deck



Variable speed control lever



Watch the video

Brush Cutters

UR012G

XGT 40Vmax 80Vmax AFT ADT BL MOTOR

- 480 mm Cutting width
- 2 kW Max output
- Reverse rotation
- Speed settings
- Variable speed

UR012GZ04 charger and battery not included



Recommended battery
BL4050F



Reverse function for easy removal of entangled grass



Watch the video

UR013G

XGT 40Vmax AFT BL MOTOR

- 450 mm Cutting width
- 1,5 kW Max output
- Reverse rotation
- Variable speed

UR013GZ03 charger and battery not included



Recommended battery
BL4050F



Reverse function for easy removal of entangled grass



Watch the video

UR101C

CONNECTX AFT ADT BL MOTOR

- 430 mm Cutting width
- 1 kW Max output
- Reverse rotation
- Speed settings
- Variable speed

UR101CZ charger and battery not included



Recommended battery
PDC1200

Compatible with
PDC1200 - PDC1500



PDC direct connector

Cordless Tools

Hedge Trimmers

CURVED PROFILE

Optimum blade shape for smooth cutting of thin branches

Very sharp blade edges thanks to the curved shape of the teeth, which only meet at the tip.



THREE SHARPENED EDGES

Optimum for rough cutting of thick branches

The blade has three very sharp edges to ensure a clean cut and minimal damage to the branch.



ASYMMETRICAL TEETH

Innovative tooth shape

The asymmetrical shape of the teeth ensures branches remain tightly gripped during cutting.



Pole Hedge Trimmer

ROUGH CUTTING

UN001G

XGT 40Vmax BL MOTOR



Max branch diameter



Run time*

600 mm

Blade length



Reverse rotation



Speed settings

UN001GZ charger and battery not included



Recommended battery
BL4040

Two-sided blade with sharp triangular teeth

*Approximate, maximum speed, no load

Three speeds for optimum control

Tiltable head: 45° upwards / 70° downwards / 180° for carrying

Ideal for trimming thick branches

Sturdy and well-balanced



Watch the video

TRIMMING

UH004G | UH005G



Max branch diameter



Run time*

600/750 mm

Blade length
UH004G / UH005G



Speed settings

UH004GZ charger and battery not included

UH004GM201 charger and 2x 4.0Ah battery included

UH004GD201 charger and 2x 2.5Ah batteries included

UH005GZ charger and battery not included

UH005GM201 charger and 2x 4.0Ah battery included

UH005GD201 charger and 2x 2.5Ah batteries included



Recommended battery
BL4040

*Approximate, maximum speed, no load

ROUGH CUTTING

UH006G | UH007G

XGT 40Vmax BL MOTOR



Max branch diameter



Run time*

600/750 mm

Blade length
UH006G / UH007G



Speed settings

UH006GZ charger and battery not included

UH006GM201 charger and 2x 4.0Ah battery included

UH006GD201 charger and 2x 2.5Ah batteries included

UH007GZ charger and battery not included

UH007GM201 charger and 2x 4.0Ah battery included

UH007GD201 charger and 2x 2.5Ah batteries included

Recommended battery
BL4040



5-position rotary handle



Control panel



Blade length 600 mm

TRIMMING

UH013G | UH014G

XGT 40Vmax BL MOTOR



Max branch diameter



Reverse rotation



Speed settings



Run time*

UH013GZ charger and battery not included

UH013GM101 charger and 4.0Ah battery included

UH013GD202 charger and 2x 2.5Ah batteries included



Recommended battery
BL4040

*Approximate, maximum speed, no load

UH014GZ charger and battery not included

UH014GM101 charger and 4.0Ah battery included

UH014GD202 charger and 2x 2.5Ah batteries included



Blade length 600 mm

UH013G

Two handles for easy operation in all cutting positions



Control panel



Watch the video



Cordless Tools

Blowers

UB004C

-  19.7 m³/min
Max air volume
-  25 N
Blowing force
-  Variable speed
-  4
Max speed
-  PDC 55 min
Run time*

UB004CZ charger and battery not included



Very comfortable harness



Telescopic blowing tube

Variable speed with cruise control



Watch the video

*Approximation, PDC1500 and maximum power

UB003C

-  24 m³/min
Max air volume
-  24 N
Blowing force
-  Variable speed
-  4
Max speed
-  PDC 60 min
Run time*

UB003CZ charger and battery not included



Highly efficient in combination with PDC1500

High air speed



Watch the video

*Approximation, PDC1500 and maximum power


UB001G

-  16 m³/min
Max air volume
-  17 N
Blowing force
-  Variable speed
-  XGT 5Ah 15 min
Run time*

UB001GZ charger and battery not included

UB001GM101 charger and 4.0Ah battery included

UB001GD202 charger and 2 x 2.5Ah battery included



Variable trigger speed control, with cruise control lever for lock-on operation



ON/OFF switch



3-stage telescopic nozzle



Watch the video

*Approximation, maximum power

Chainsaws

UC024G

-  1.6 kW
Max output
-  1.1 mm
Chain gauge
-  0.325"
Chain pitch
-  200 ml
Chain oil tank volume
-  Captive nuts

UC024GZ charger and battery not included



Recommended battery BL4050F

Safety switch

Excellent balance

Chain bar length 300 mm



Watch the video

UC025G

-  1.6 kW
Max output
-  1.1 mm
Chain gauge
-  0.325"
Chain pitch
-  200 ml
Chain oil tank volume
-  Captive nuts

UC025GZ charger and battery not included



Recommended battery BL4050F

Safety switch

Excellent balance

Chain bar length 350 mm



Watch the video



Cordless Tools

Top Handle Chainsaws

UC002G



UC002GZ charger and battery not included

UC002GM101 charger and 4.0Ah battery included

UC002GD202 charger and 2 x 2.5Ah batteries included



Recommended battery
BL4040F



UC003G



UC003GZ charger and battery not included

UC003GM101 charger and 4.0Ah battery included

UC003GD202 charger and 2 x 2.5Ah batteries included



Recommended battery
BL4040F



Captive nuts prevent nut loss



Pole Chainsaw

UA004G




UA004GZ charger and battery not included



Recommended battery
BL4040F

Slim saw head
Chain bar length 300 mm

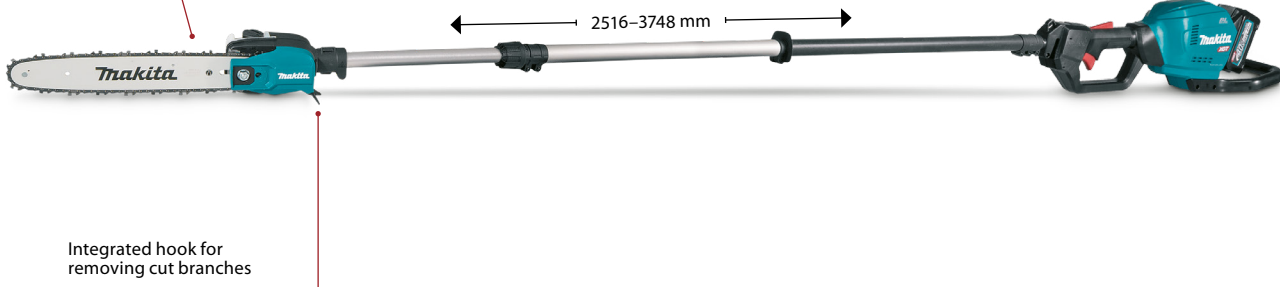

Telescopic pole









Watch the video



Cordless Tools

Earth Auger


DG001G   **ADT** 









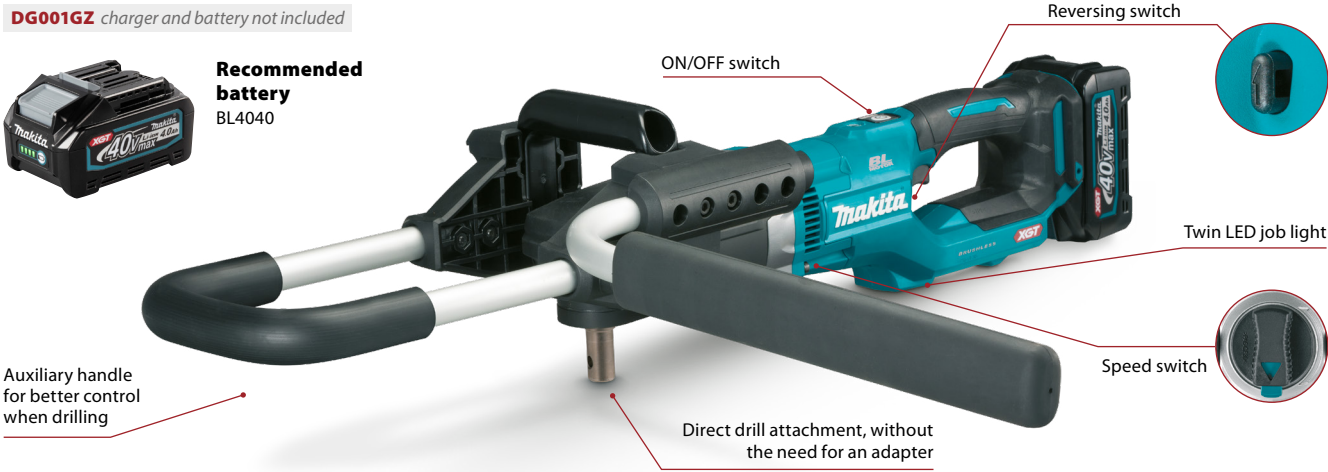







-  Direct attachment
-  200 mm Max drilling capacity
-  Speed settings
-  Variable speed
-  Reversing switch
-  Safety clutch


DG001GZ charger and battery not included



Recommended battery
BL4040





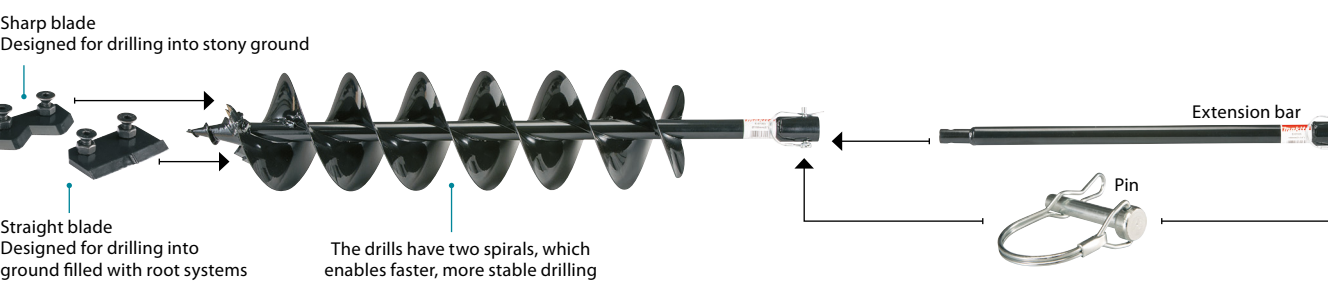




Model	Shank type	Part No.	Item	Diameter	Length	Working length	Spare blades
DG001G			Drill bit	ø 50 mm	800 mm	550 mm	 E-13649
				ø 60 mm			 E-13655
				ø 80 mm			 E-13661
				ø 100 mm			 E-07630
				ø 150 mm			 E-07646
				ø 200 mm			 E-07652
			Extension bar	-	540 mm	-	-
			Pin	-	-	-	-



Power Washer

HW001G   **BL** 

-  85 bar Pressure
-  5,5 l/min Water flow
-  5 m Hose length
-  Self-priming function
-  Run time*  5Ah
-  Speed settings

HW001GZ charger and battery not included



Recommended battery
BL4050F

*Approximation, maximum power with two batteries

3 pressure settings:
30 bar for light washing
55 bar for washing vehicles, farm equipment, etc.
85 bar for washing exterior buildings, etc.



Watch the video



Cordless Tools

Multi-Tool System

UX01G

XGT 40V MAX AFT BL MOTOR



Speed settings



Max output




Reverse rotation

UX01GZ motor only charger and battery not included

UX01GD202 charger and 2 x 2.5Ah batteries included



Recommended battery
BL4040

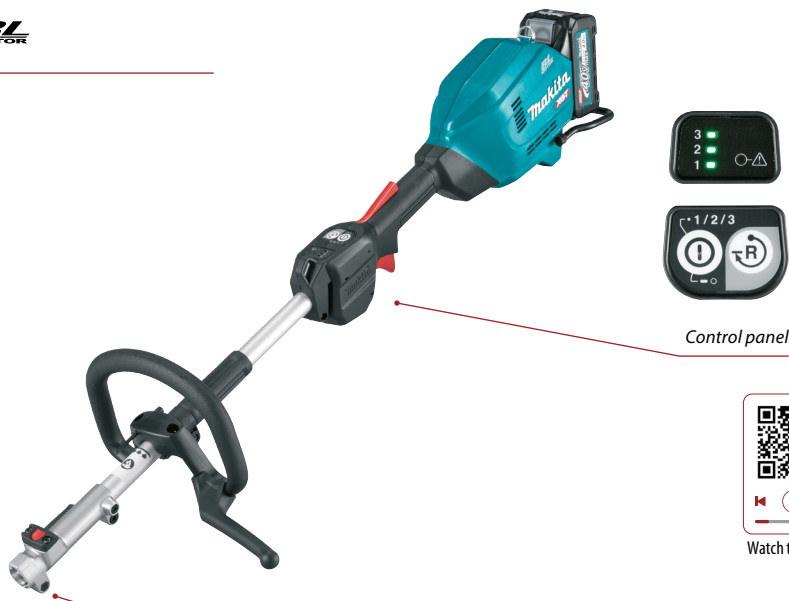

Quick toolless attachment connection system

Optional attachments

	EM407MP Rotary scissors 191M56-3		KR400MP Cultivator 195711-1		EE400MP Edger 196752-0		196745-7 Blade for EE400MP
	WA400MP Weeding 1913P8-6		1913L5-4 220 mm blade for WA400MP		1913L6-2 80 mm blade for WA400MP		1913L7-0 170 mm blade for WA400MP
	EN424MP Ground trimmer 1913C9-3		PF400MP Pump DEAPF400MP		EM408MP Grass trimmer 191N31-5		EN422MP Ground trimmer 25 cm Angle adjustment 1912T0-4
	SN400MP Snow accessory EUASN400MP		EN402MP Hedge trimmer 50 cm Angle adjustment 1912T8-8		EN401MP Hedge trimmer 49 cm Angle adjustment 196256-2		EY403MP Pole saw 191T38-7
	UB401MP Blower Low noise 191P72-3		UB402MP Blower 1912R8-4		BR400MP Power brush 199318-5		SW400MP Power sweep 199339-7
	1912V6-6 Shear blade set for EN424MP		LE400MP Shaft extension 1080 mm 191E24-8		EM404MP Brush cutter attachment 198768-1		

Lights

ML010G

XGT 40V MAX LXT DC AC



Luminous flux



Luminance at 5m



Lightning modes



Light diffusing option

EUAML010G charger and battery not included



Recommended battery
BL4080F



Watch the video

Up to 8 of these work lights can be linked together

The self-righting design ensures it won't fall over if knocked.



ML005GX

XGT 40V MAX LXT 18V LUMINOUS FLUX



Luminous flux



Luminance at 5m



Lightning modes



Light diffusing option

ML005GX charger and battery not included



Recommended battery
BL4050F

Can be tilted from -30° to 210°



ML009GX

XGT 40V MAX LXT 18V LUMINOUS FLUX



Luminous flux



Luminance at 5m



Lightning modes



Light diffusing option

ML009GX charger and battery not included



Recommended battery
BL4050F

240° angle adjustment



Cordless Tools

Blower

AS001G

XGT 40V max BL MOTOR

- 2,8 N
- Speed modes
- XGT 2.5Ah
- 13 - 50 min
- Run time (Max - min power)

AS001GZ05 charger and battery not included



Recommended battery
BL4040



Heavy Duty



Power Cutters

CE003G


XGT 40V max AFT BL MOTOR

- 230 mm
- 88 mm
- 6.600 RPM
- Electric brake

CE003GZ02 charger and battery not included



Recommended battery
BL4080F

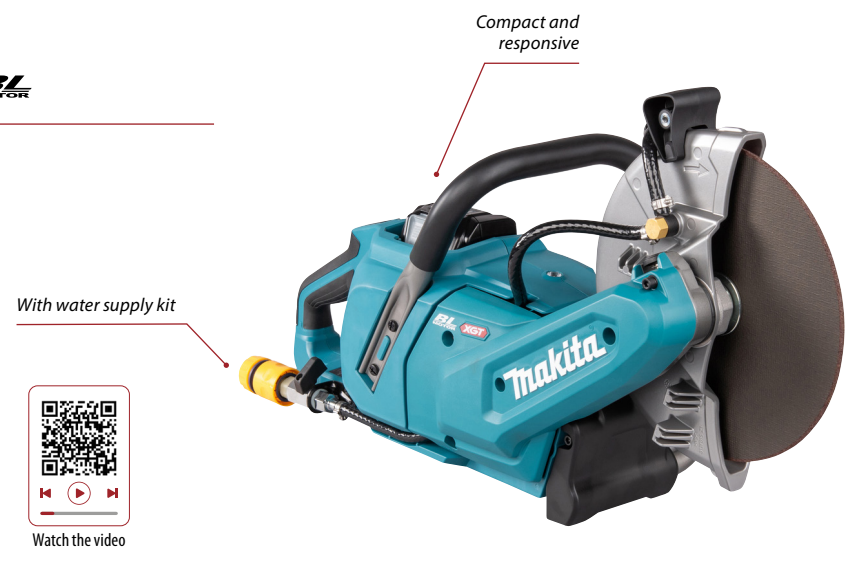

CE004G


XGT 40V max AFT BL MOTOR

- 305 mm
- 121 mm
- 5.000 RPM
- Electric brake

CE004GZ charger and battery not included



Recommended battery
BL4080F

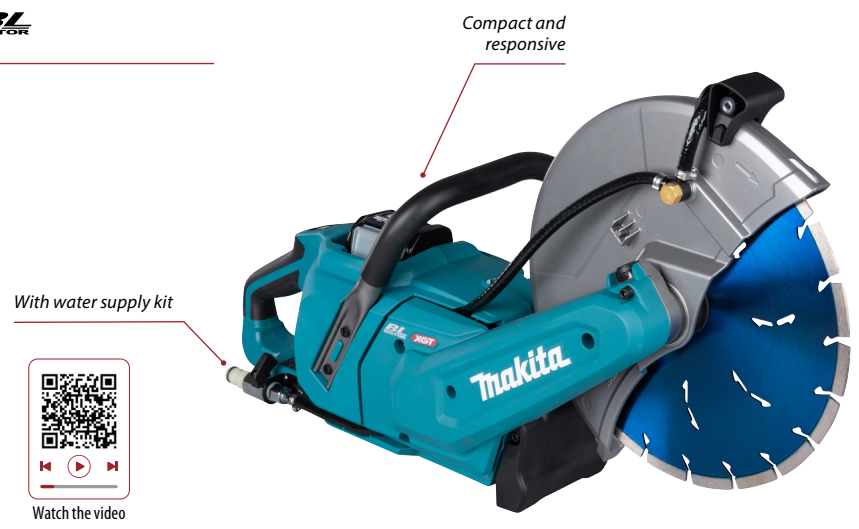

CE001G

XGT 40V max AFT BL MOTOR

- 355 mm
- 127 mm
- 5.300 RPM
- Electric brake

CE001GZ charger and battery not included







Recommended battery
BL4080F



Cordless Tools

Cooler and Warmer Boxes

CW001G

-  Cooling capacity
-18 °C
-  Heating capacity
60 °C
-  USB-A
5V/2,4A
-  DC 12 v
AC adapter available



Large 20 l capacity





CW001GZ battery and charger not included



Recommended battery
BL4050F

7 cooling settings
-18, -15, -10, -5, 0, 5 and 10 °C.
7 heating settings
30, 35, 40, 45, 50, 55 and 60 °C

CW002G

-  Cooling capacity
-18 °C
-  Heating capacity
60 °C
-  USB-A
5V/2,4A
-  DC 12 v
AC adapter available



Large 50 l capacity





CW002GZ battery and charger not included



Recommended battery
BL4050F

7 cooling settings
-18, -15, -10, -5, 0, 5 and 10 °C.
7 heating settings
30, 35, 40, 45, 50, 55 and 60 °C

CW003G

-  Cooling capacity
-18 °C
-  Heating capacity
60 °C
-  USB-A
5V/2,4A
-  DC 12 v
AC adapter available



7 l capacity

CW003GZ battery and charger not included



Recommended battery
BL4050F





7 cooling settings
-18, -15, -10, -5, 0, 5 and 10 °C.
7 heating settings
30, 35, 40, 45, 50, 55 and 60 °C



Watch the video

Radio, Fan

MR004GZ Bluetooth

-  DAB/DAB+
DAB/DAB+
-  FM
FM
-  5V/2,4A
USB-A
-  AUX
AUX

MR004GZ charger and battery not included, power adapter included

Built-in FM antenna in the carrying handle



CF002GZ

-  330 mm
Diameter
-  4 m/sec
Air speed
-  XGT 4Ah
▲ 5 h
Run time
-  timer
Timer function

CF002GZ charger and battery not included, power adapter included

Tiltable: 90° upwards / 45° downwards

With swivel function, 45° left, 45° right





ONE BATTERY COUNTLESS SOLUTIONS

MAKITAUK.COM

Accessories shown are not necessarily supplied as standard equipment.
Prices and specification shown may change owing to our policy of constant improvement.
Subject to availability. E&OE.