

CORDLESS MAINTENANCE FOR

HEAVY DUTY MACHINERY

makita-see.com



Grease gun 12



Vacuum pump 13



Inflator 13



Blower 10



Vacuum sweeper 22



Pressure washer 23

Mechanical & Specialized Systems

For lubricating mechanical components and servicing specialized air systems.



Angle impact wrench 11



Rachet wrench 11

Narrow Spaces & Utility

Designed for accessing and fastening bolts in confined, hard-to-reach areas.

Undercarriage & chassis

High-torque impact wrenches for loosening and tightening large bolts on tracks, sprockets, and chassis



Impact wrench TW009G 8



Impact wrench TW010G 8



Impact wrench TW001G 9



Impact wrench TW011G 9

Attachments


For material removal on hydraulic components and attachments.



Demolition hammer 15



Recopro saw 15

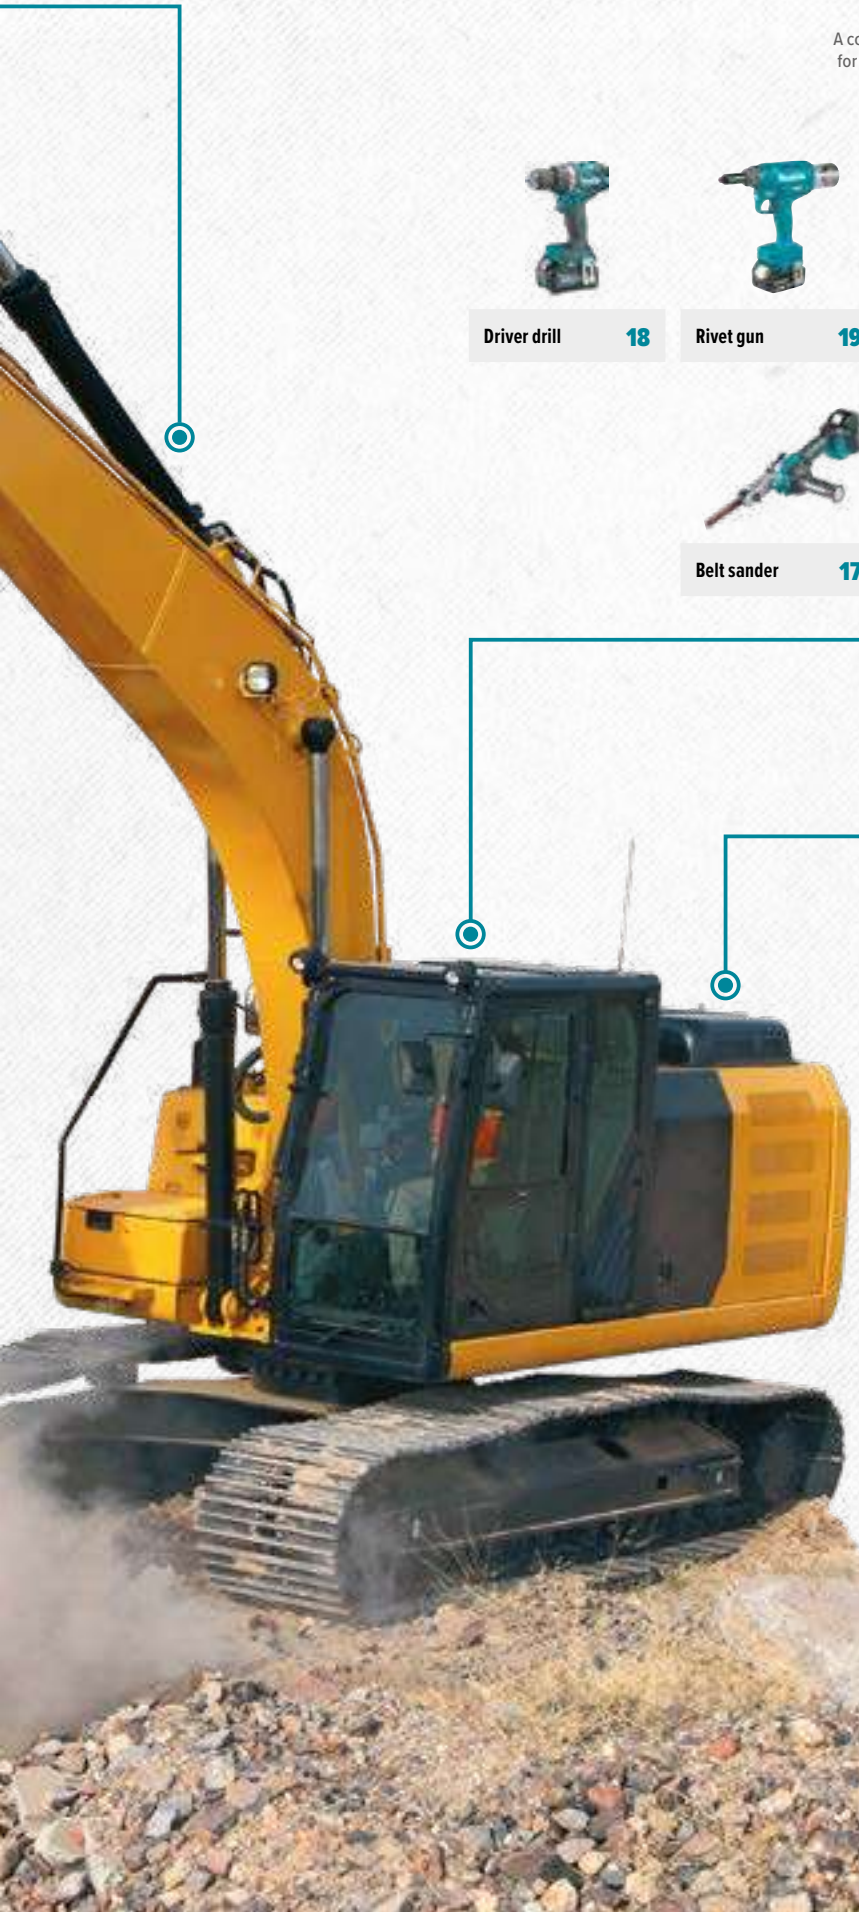



Flashlight 26 | Barlight 26 | Worklight 26



Maktrak 24

Lighting

A complete system of portable lights for optimal visibility in any situation.

Transport

Introducing the next generation in modular storage systems

Driver drill 18

Rivet gun 19



Angle grinder GA005G 16



Angle grinder GA038G 16



Die grinder 17

Belt sander 17



Random orbit sander 20



Orbital sander 20



Caulking Gun 19

Body & frame

Tools for general-purpose fastening, cutting, and shaping on the machine's exterior.

Cab & Interior

For general cleaning and maintenance of the operator's cab and interior.



Vacuum cleaner 21



Cleaner 21



Polish scrub 22

Engine Bay

Essential for fastening, light cleaning, and repairs in the engine compartment.



Impact wrench TW005G 10



Impact driver TD004G 18



Heat gun 12



Dust blower 14

Trucks & trailers

Fastening & disassembly

Used for wheel changes, chassis, suspension, and brake service. Provides power for loosening large bolts and nuts on heavy-duty components.

TW009G / TW010G 8
TW001G / TW011G 9
TW005G 10
DTL300 11
DWR180 11
DF002G 18
TD004G 18

Lubrication & fluids

Ensures proper greasing of joints, fifth-wheel couplings, and hydraulic fittings. Also used for air pressure checks and fluid servicing.

GP001G 12
DVP181 13
MP001G 13

Frame, structure & body work

For grinding, cutting, and general repair of truck frames, brackets, and body panels.

GA038G 16
GA005G 16
JR002G 15
GD001G 17

Cleaning & maintenance

Used for cleaning filters, radiators, and engine bays, as well as maintaining cabins and undercarriage areas.

AS001G 14
UB001G 14
HW001G 23
VC014G 21
CL001G 21

Lighting & inspection

Portable lighting for underbody inspection, trailer checks, and night-time service work.

ML007G 26
ML012G / DML818 26
DML814 26



Truck & trailer maintenance essentials: TW010G, TW005G, DTL300, GP001G, MP001G, GA005G, AS001G, UB001G, HW001G, DML814

Agricultural machinery

Fastening & disassembly

Used for drivetrain, wheel, and implement maintenance. Handles high-torque bolts on axles, joints, and frame connections.

TW009G / TW010G 8
TW001G / TW011G 9
TW007G / TW005G 10
DTL300 11
DWR180 11
DF002G 18
TD004G 18

Lubrication & fluids

Essential for greasing pivot points, PTO shafts, and hydraulic couplers. Also supports tyre and air system maintenance.

GP001G 12
DVP181 13
MP001G 13

Frame, structure & body work

For sharpening, repairing, or fabricating parts of frames, loader arms, and attachments.

TW007G 10
HM001G 15
JR002G 15
GA038G / GA005G 16
GD001G 17
DBS180 17

Cleaning & maintenance

Cleans radiators, filters, cabins, and engine compartments after fieldwork to prevent overheating and wear.

AS001G 14
UB001G 14
HW001G 23
VC014G 21
CL001G 21

Lighting & inspection

Provides illumination for field service, barn repairs, and night-time machinery checks.

ML007G 26
ML012G / DML818 26
DML814 26



Agricultural maintenance essentials: TW010G, TW007G, TW001G, GP001G, HM001G, GA005G, AS001G, HW001G, DML814

Tabless technology

High output batteries

Check video



Check video

40 V max XGT
***BL4040F** 4,0 Ah*

40 V max XGT
***BL4080H** 8,0 Ah*

35% MORE POWER

31% COOLER RUNNING

Battery cell comparison


THE POWER OF INNOVATION


TABLESS CELL DESIGN

Stronger, smarter and cooler

Without traditional tabs, current flows through multiple paths, reducing resistance and heat. The result — powerful, consistent performance.

- Shorter current path for efficient energy flow
- Runs cooler under continuous load
- Up to **35% more power** for high-demand applications
- Designed for sustained performance in demanding use

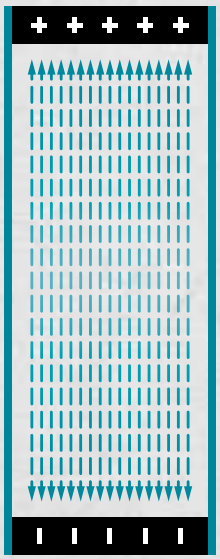

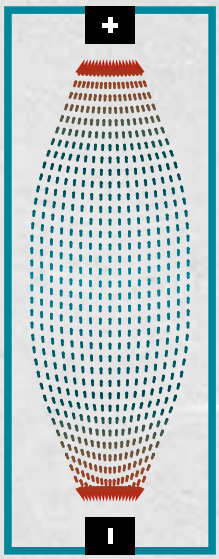

TABBED CELL DESIGN


Balanced power

The established cell layout provides stable output and wide tool compatibility, delivering dependable performance across diverse tasks.

- Traditional structure with steady energy delivery
- Optimised for versatile, all-around applications
- Compatible with the entire XGT range
- Reliable power for everyday and intensive use

40 V max - XGT batteries and chargers

Maximum power

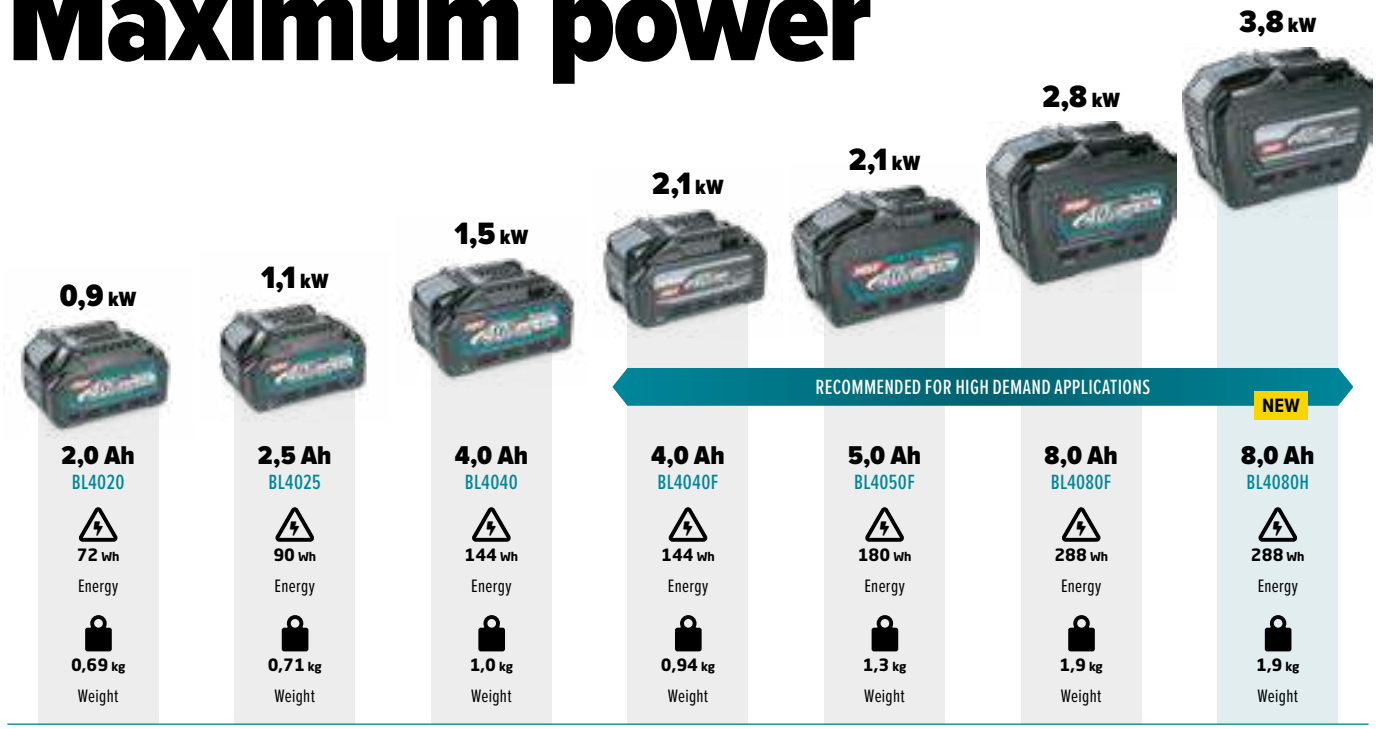



XGT

DC40RA

40 V max - XGT rapid charger

6 - 12 A Charging current | 250 W Power | Rapid charging | 2 x Cooling fan

- Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- Two cooling fans which cool the battery and charging circuit for faster charging
- With ADP10 adapter, supports rapid charging of LXT 18 V batteries

Charging times for one battery

BL4020 / 2,0 Ah	**22 min**
BL4025 / 2,5 Ah	**28 min**
BL4040 or BL4040F / 4,0 Ah	**45 min**
BL4050F / 5,0 Ah	**50 min**
BL4080F or BL4080H / 8,0 Ah	**76 min**



XGT

DC40RB

40 V max - XGT dual rapid charger

6 - 12 A Charging current | 250 W Power | Rapid charging | 3 x Cooling fan

- Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- Three cooling fans which cool the battery and charging circuit for faster charging
- With ADP10 adapter, supports rapid charging of LXT 18 V batteries

Simultaneous charging times for two batteries

BL4020 / 2,0 Ah	**22 min**
BL4025 / 2,5 Ah	**28 min**
BL4040 or BL4040F / 4,0 Ah	**45 min**
BL4050F / 5,0 Ah	**50 min**
BL4080F or BL4080H / 8,0 Ah	**76 min**



XGT

DC40RC


40 V max - XGT charger

4 A Charging current | 170 W Power | Charging | 1 x Cooling fan

- Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- With cooling fan which circulates the air trough the battery for faster charging
- With ADP10 adapter, supports rapid charging of LXT 18 V batteries

Charging times for one battery

BL4020 / 2,0 Ah	**30 min**
BL4025 / 2,5 Ah	**38 min**
BL4040 or BL4040F / 4,0 Ah	**67 min**
BL4050F / 5,0 Ah	**85 min**
BL4080F or BL4080H / 8,0 Ah	**170 min**



XGT

DC40WA

40 V max - XGT dual charger

1,1 A Charging current | 79,2 W Power | Charging

- Can be mounted on the wall
- LED charging / error indicator

Simultaneous charging times for two batteries

BL4020 / 2,0 Ah	**110 min**
BL4025 / 2,5 Ah	**130 min**
BL4040 or BL4040F / 4,0 Ah	**210 min**
BL4050F / 5,0 Ah	**260 min**
BL4080F or BL4080H / 8,0 Ah	**420 min**

XGT

ADP12

40 V Max - XGT® communication adapter

- ADP12 connects XGT machines, batteries, mobile devices, and PCs for effortless data sharing. It also features anti-theft protection, a handy notepad, and a battery timer.



PIN lock tool & battery

Track tool & battery usage history

Schedule operating time


Bulk change settings

Store important information

Check video

18 V - LXT batteries and chargers

Extended runtime

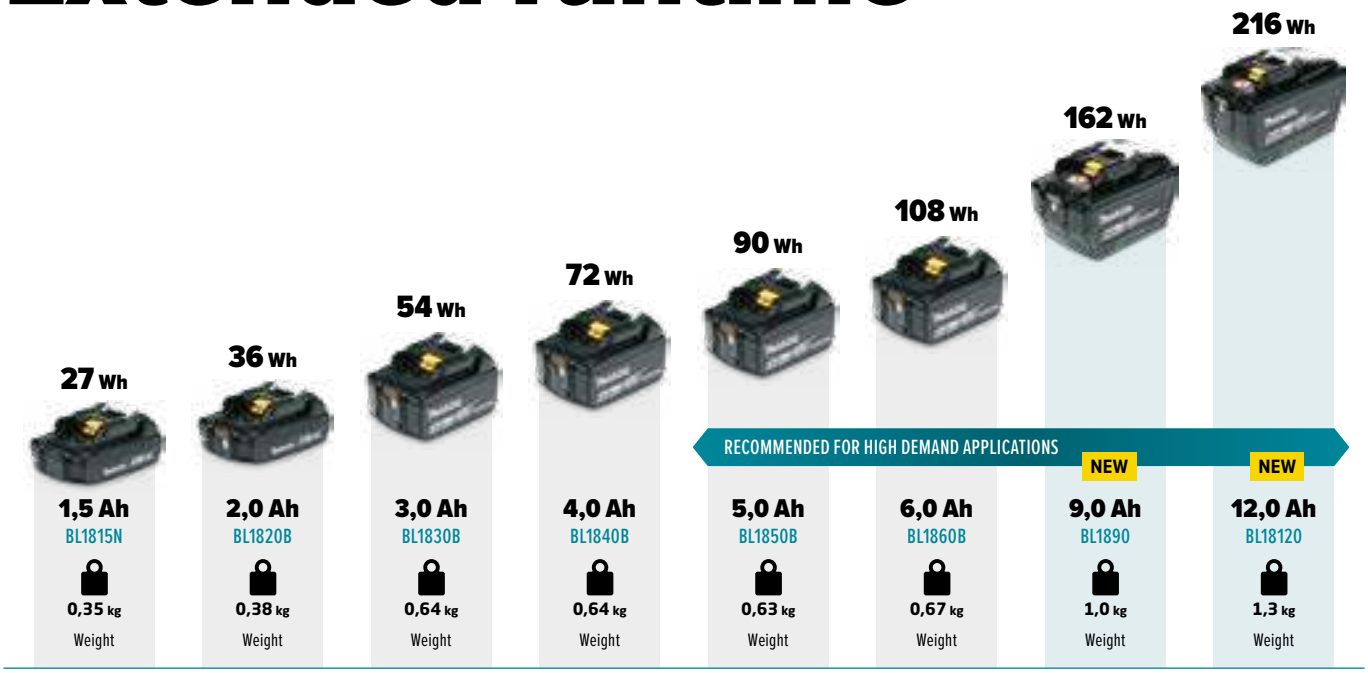

◂ COMPACT SIZE

LONGER RUN TIME ▸



LXT

DC18RC

18 V - LXT rapid charger

9 A	190 W		1 x
Charging current	Power	Rapid charging	Cooling fan

- Communicates with battery chip to optimize charging and extend battery life
- With cooling fan which circulates the air trough the battery for faster charging

Charging times for one battery

BL1815N / 1,5 Ah	**15 min**
BL1820B / 2,0 Ah	**24 min**
BL1830B / 3,0 Ah	**22 min**
BL1840B / 4,0 Ah	**36 min**
BL1850B / 5,0 Ah	**45 min**
BL1860B / 6,0 Ah	**55 min**
BL1890 / 9,0 Ah	**85 min**
BL18120 / 12,0 Ah	**120 min**



LXT

DC18RD

18 V - LXT dual rapid charger

9 A	190 W		2 x
Charging current	Power	Rapid charging	Cooling fan

- Communicates with battery chip to optimize charging and extend battery life
- Two cooling fans which cool the battery and charging circuit for faster charging

Simultaneous charging times for two batteries

BL1815N / 1,5 Ah	**15 min**
BL1820B / 2,0 Ah	**24 min**
BL1830B / 3,0 Ah	**22 min**
BL1840B / 4,0 Ah	**36 min**
BL1850B / 5,0 Ah	**45 min**
BL1860B / 6,0 Ah	**55 min**
BL1890 / 9,0 Ah	**85 min**
BL18120 / 12,0 Ah	**120 min**



LXT

DC18SD

18 V - LXT charger

2,6 A	55 W	
Charging current	Power	Charging

- Communicates with battery chip to optimize charging and extend battery life

Charging times for one battery

BL1815N / 1,5 Ah	**30 min**
BL1820B / 2,0 Ah	**45 min**
BL1830B / 3,0 Ah	**60 min**
BL1840B / 4,0 Ah	**90 min**
BL1850B / 5,0 Ah	**110 min**
BL1860B / 6,0 Ah	**130 min**
BL1890 / 9,0 Ah	**200 min**
BL18120 / 12,0 Ah	**270 min**



LXT

DC18SH

18 V - LXT dual charger

2,6 A	55 W	
Charging current	Power	Charging

- Communicates with battery chip to optimize charging and extend battery life

Simultaneous charging times for two batteries

BL1815N / 1,5 Ah	**30 min**
BL1820B / 2,0 Ah	**45 min**
BL1830B / 3,0 Ah	**60 min**
BL1840B / 4,0 Ah	**90 min**
BL1850B / 5,0 Ah	**110 min**
BL1860B / 6,0 Ah	**130 min**
BL1890 / 9,0 Ah	**200 min**
BL18120 / 12,0 Ah	**270 min**

LXT

BPS01

18 V - LXT Sync lock battery terminal

- Time-based battery lock with PIN authentication restricts use to specific days and hours
- Configurable via NFC on a smartphone or by USB cable on a desktop or laptop computer



PIN lock Battery

Schedule operating time

Registration user name



Accessories for 1" impact wrenches



E-24511
27 mm impact socket with O ring and Pin



E-24533
32 mm impact socket with O ring and Pin



E-24561
36 mm impact socket with O ring and Pin



E-24608
42 mm impact socket with O ring and Pin



E-24701
32 mm deep impact socket with O ring and Pin



E-24739
36 mm deep impact socket with O ring and Pin



E-24773
46 mm deep impact socket with O ring and Pin

Check video



XGT

TW009G

BL MOTOR XPT

40 V max - XGT Impact wrench 1"

1"	3.150 Nm	4.000 Nm		
Square drive	Fastening	Nut-busting	Auto-stop modes	Speed settings

- 1" anvil with friction ring and thru hole retention system for maximum productivity
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- The handle can be rotated 360° (increments of 45°) and tilted back and forth in 9 steps

TW009GT201 includes: rapid charger DC40RA, 2x 5,0 Ah battery BL4050F and plastic case
TW009GZ without batteries and charger

XGT

TW010G

BL MOTOR XPT

40 V max - XGT Impact wrench 1"

1"	3.150 Nm	4.000 Nm		
Square drive	Fastening	Nut-busting	Auto-stop modes	Speed settings

- 1" long anvil with friction ring and thru hole retention system for maximum productivity
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- The handle can be rotated 360° (increments of 45°) and tilted back and forth in 9 steps

TW010GT201 includes: rapid charger DC40RA, 2x 5,0 Ah battery BL4050F and plastic case
TW010GZ without batteries and charger



Its robust performance makes it ideal for tackling heavy-duty tasks effortlessly, whether it's loosening stubborn nuts or tightening bolts with precision. This wrench ensures efficiency and reliability, promising to be a valuable tool in any demanding mechanical or industrial setting.



Check video



XGT

TW001G

BL MOTOR XPT

40 V max - XGT Impact wrench 3/4"

3/4"	1.800 Nm	2.050 Nm		
Square drive	Fastening	Nut-busting	Auto-stop modes	Speed settings

- 3/4" anvil with friction ring and thru hole retention system for maximum productivity
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

TW001GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and Makpac 3
TW001GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 3
TW001GZ without batteries and charger

XGT

TW011G

BL MOTOR XPT

40 V max - XGT Impact wrench 3/4"

3/4"	1.800 Nm	2.050 Nm		
Square drive	Fastening	Nut-busting	Auto-stop modes	Speed settings

- 3/4" long anvil with friction ring and thru hole retention system for maximum productivity
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

TW011GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and Makpac 3
TW011GZ without batteries and charger



The 3/4" cordless impact wrench, boasting an impressive 2.050 Nm of torque, plays a crucial role in heavy-duty machine maintenance. It excels at efficiently loosening and tightening large bolts and heavy-duty fasteners, making it an indispensable tool for tasks involving construction equipment, agriculture machinery and industrial vehicles.

Accessories for 3/4" impact wrenches



E-22280
27 mm impact socket with O ring and pin



E-22305
32 mm impact socket with O ring and pin



E-22377
30 mm deep impact socket with O ring and pin



E-22399
32 mm deep impact socket with O ring and Pin



134863-3
36 mm deep impact socket with O ring and Pin



191G67-2
Extension handle

Accessories for 1/2" impact wrenches



E-16570

Impact black 1/2" impact sockets set with O ring and pin: 8, 10, 12, 13, 14, 16, 17, 19, 21 mm



E-12354

1/2" impact deep sockets for wheel nut with O ring and pin: 17, 19 and 21



E-16617

Impact black 1/2" impact sockets set with O ring and pin: 10, 11, 13, 17, 19, 21, 22, 24, 27 mm



B-55706

1/2" impact socket extenion bar: 250 mm



B-68448

1/2" adapter for 1/4" Hex bits



191K57-9

Tool hanger



XGT

TW007G BL MOTOR XPT

40 V max - XGT impact wrench 1/2"

1/2"	760 Nm	1.100 Nm	Auto-stop modes	Speed settings
Square drive	Fastening	Nut-busting		

- Compact design with a short overall length of 170 mm
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

TW007GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and Makpac 3
TW007GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 3
TW007GZ without batteries and charger



XGT

TW005G BL MOTOR XPT

40 V max - XGT impact wrench 1/2"

1/2"	350 Nm	630 Nm	Auto-stop modes	Speed settings
Square drive	Fastening	Nut-busting		

- Equipped with a 1/2" pin detent socket retention system for secure attachment
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- Compact length at only 144 mm; ideal for working in tight spaces

TW005GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 2
TW005GZ without batteries and charger



The cordless 1/2" impact wrench is essential for heavy-duty machine maintenance, enabling fastening and loosening of bolts, nuts and other fasteners with ease. Its compact size and portability make it ideal for working in tight spaces on various machinery components.

LXT range



DTW1001
18 V - LXT impact wrench
1.050 Nm, 3/4"



DTW701
18 V - LXT impact wrench
700 Nm, 1/2"



DTW301
18 V - LXT impact wrench
330 Nm, 1/2"





LXT

DTL300

BL MOTOR XPT

18 V - LXT angle impact wrench 1/2"

1/2"	360 Nm	530 Nm		3
Square drive	Fastening	Nut-busting	Auto-stop modes	Speed settings

- 1/2" anvil with friction ring and thru hole retention system for maximum productivity
- 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- Ideal for working in tight spaces and overhead applications

DTL300Z without batteries and charger

LXT

DWR180

XPT

18 V - LXT ratchet wrench 1/4" / 3/8"

3/8 / 1/4"	47,5 Nm	13 mm		1
Square drive	Fastening	Threaded rods	Manual rathet option	Speed settings

- Interchangeable 3/8" and 1/4" anvils for added versatility
- Ideal for working in tight spaces and overhead applications
- Can be used as manual ratchet when motor is not engaged

DWR180Z without batteries and charger





The cordless tools are designed for work in tight and hard-to-reach spaces, enabling fast and efficient fastening and loosening. Thanks to their compact design, they are ideal for servicing heavy-duty machinery, especially during maintenance tasks where access is limited but reliability and precision are essential

Accessories for 3/8" rachet wrench



B-39920
10 mm impact socket



B-39942
12 mm impact socket



B-39958
13 mm impact socket



B-39964
14 mm impact socket



B-39970
15 mm impact socket



B-39992
17 mm impact socket



B-40004
18 mm impact socket



B-40010
19 mm impact socket

Accessories for grease gun



122D16-0
410 g grease cartridge A



1916S5-1
Flexible hose with coupler - 1.200 mm

1911M9-1
Extension pipe for flexible hose



191W60-2
3 grease coupler set



191A77-3
Grease angle coupler



1915E6-5
Joint for connecting a 500 g grease cartridge to the tool





XGT

GP001G

BL MOTOR XPT

40 V max - XGT grease gun

350 ml/min	69 MPa	455 g	1,2 m	
Flow rate	Pressure	Bulk grease capacity	Hose length	Air bleed valve

- Features four speed modes—145, 220, 290 and 350 ml/min—with a variable speed trigger for enhanced control
- Air bleed valve assists in faster pump priming
- Lock-on button for easier and more consistent grease delivery during extended operation

GP001GZ without batteries and charger

XGT

HG001G

40 V max - XGT heat gun

600 °C	+10 °C	180 l/min		
Air temperature	Temperature adjustment	Air flow	Speed dial	Quick release

- Temperature adjustable from ambient to 600 °C in 10 °C increments
- Adjustable airflow settings: 70, 100, 140, 180 l/min
- LCD display shows temperature (°C/°F), airflow, battery level and error alerts – all with memory function

HG001G with plastic case and without batteries and charger

Accessories for heat gun



PR00000029
Wide-slot nozzle



PR00000030
Reflector nozzle



PR00000032
Overlap welding nozzle



PR00000034
Welding nozzle





The cordless grease gun is essential for heavy-duty machine maintenance, enabling efficient lubrication of critical components for smooth operation and long service life. The cordless heat gun supports safe and precise heating for cable repairs and heat-shrink applications in confined engine compartments.

LXT range



DGP180
18 V - LXT grease gun
290/145 ml/min, 69 MPa



DHG181
18 V - LXT heat gun
550/450/350/250/150°C, 200/120 l/min



DHG180
18 V - LXT heat gun
500°C, 200 l/min

Check video





XGT

MP001G

40 V max - XGT high-pressure inflator

11,1 bar			65 cm	
Air pressure	Inflation modes	Air release button	Hose length	LED job light

- Air release button allows pressure to be released if over inflation occurs
- Auto-stop function automatically stops inflation when preset air pressure is reached to prevent overfill
- Three speed settings (High/Medium/Low)

MP001G without batteries and charger

LXT

DVP181

18 V - LXT vacuum pump

4 CFM	3 Pa	113 l/min		300 ml
Vacuum class	Vacuum	Flow rate	Drain port	Oil tank capacity

- Powerful dual-stage compression for efficient evacuation of large HVAC systems in heavy-duty equipment
- Built-in electromagnetic check valve prevents backflow, ensuring safe and reliable operation even during sudden shutdowns
- Ideal for purging air during maintenance of large-scale air conditioning and refrigeration units

DVP181ZK with plastic case and without batteries and charger





The cordless high-pressure inflator is essential for heavy-duty machine maintenance, enabling fast and accurate inflation of tyres and pressure systems on site. The cordless vacuum pump supports reliable servicing of HVAC systems by efficiently removing air and moisture to ensure correct system operation and long-term performance

LXT range



DMP181
18 V - LXT high-pressure inflator
11/7/2 bar



DMP180
18 V - LXT high-pressure inflator
8/7/2 bar



DVP180
18 V - LXT vacuum pump
20 Pa, 50 l/min

Accessories for inflator



TE00000691
Air pump adapter with 30° head angle



TE00000796
Air pump adapter with 0° head angle

Accessories for vacuum pumps



AS0VP051MK
Intake shut-off valve with gauge



AS00XP808M
Vacuum gauge



AS0AI154MK
Vacuum hose



AS00VP050M
Vacuum pump oil



AS0Y06110K
Adapter

Accessories for dust blower



191X13-7

ø 7 mm nozzle for cleaning filters



191X15-3

ø 13 mm nozzle for blowing



191X19-5

Wide angle nozzle



191X78-9

Nozzles for blowing in narrow space



191X21-8

Flexible hose nozzle



191X29-2

Filter assembly

Accessories for blower



123241-2

Dust bag

Check video



XGT

AS001G

40 V max - XGT blower

200 m/s	1,1 m³/min	2,8 N	4	
Air velocity	Air volume	Blowing force	Variable speed	Quick release

- 4 digitally controlled speeds for a wide range of applications
- 5 nozzles included for a wide range of applications
- Filter on blower intake reduces dust being blown through the blower

AS001GZ without batteries and charger

Check video



XGT

UB002G

40 V max - XGT blower / vacuum

99 m/s	3,6 m³/min	3,1 N	x3	5,4 kPa
Air velocity	Air volume	Blowing force	No. of speeds	Suction

- Switch with variable speed control and 3-stage speed control
- With long garden nozzle and short standard nozzle
- Convenient vacuum function by moving the nozzle to the suction inlet and attaching an optional dust bag (123241-2)

UB002GZ01 without batteries and charger



Use a cordless dust blower to clean air filters and remove debris from engine compartments, cooling systems, electrical panels and hard-to-reach areas on heavy-duty machinery.

LXT range



DAS180

18 V - LXT dust blower

200 m/s, 2,8 N



UB001G

40 V max - XGT blower

64 m/s, 17 N



DUB184

18 V - LXT blower

52,1 m/s, 10,9 N

Check video



JR002G

BL MOTOR AVT XPT

40 V max - XGT recipro saw

32 mm	255 mm	130 mm		
Stroke length	Cutting in wood	Cutting in steel	Cutting functions	Speed dial

- Delivers the power of a 1.800 W corded reciprocating saw
- On/Off orbital feature provides more aggressive cuts
- Refined crank mechanism design minimizes blade deflection and reduces vibration

JR002GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and plastic case
JR002GZ without batteries and charger



Cordless reciprocating saw for cutting metal, plastic and wood in heavy-duty maintenance and demolition tasks

Check video



HM001G

BL MOTOR AVT AWS XPT

40 V max - XGT demolition hammer

SDS-Max	9,4 J	12		
Shank type	Impact energy	Angle bit setting	Speed dial	Constant speed

- Adapted for SDS-MAX bits
- Constant speed control automatically applies additional power under load for optimum performance
- Dust extraction capability with optional Makita Dust Attachment Kit

HM001GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and plastic case
HM001GZ02 without batteries and charger



Versatile cordless demolition hammer for heavy-duty maintenance, like cleaning grousers, blades and buckets.

LXT range



DJR360
18 + 18 V - LXT recipro saw
32 mm, 255/130 mm



DHK180
18 V - LXT demolition hammer
3,1 J, SDS-Plus

Accessories for recipro saw



B-55594
305 mm reciprosaw blade with tungsten carbide tip for metal, mild steel, cast iron and stainless steel




B-63585
305 mm reciprosaw blade with tungsten carbide tip for aerated concrete and epoxy




B-10403
455 mm reciprosaw blade with tungsten carbide tip for aerated concrete


Accessories for demolition hammer

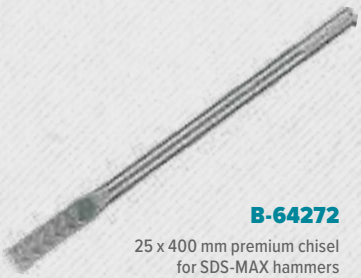

B-64272
25 x 400 mm premium chisel for SDS-MAX hammers

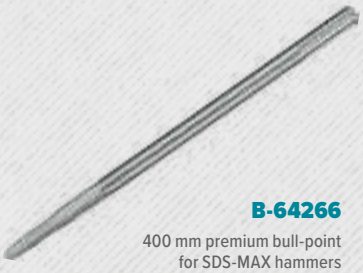

B-64266
400 mm premium bull-point for SDS-MAX hammers

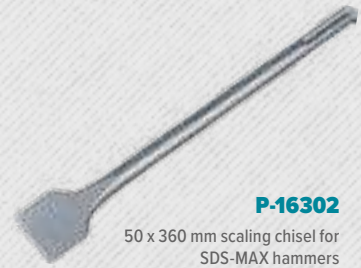

P-16302
50 x 360 mm scaling chisel for SDS-MAX hammers

Accessories for angle grinders



B-55326

230 mm diamond wheel for multi material: steel, stainless steel, nonferrous metal, PVC, concrete, glass



E-13764

230 mm thin cut off wheel for stainless steel, metal and mild steel



B-55310

125 mm diamond wheel for multi material: steel, stainless steel, nonferrous metal, PVC, concrete, glass



E-03040

125 mm thin cut off wheel for stainless steel, metal and mild steel



B-29022

125 mm fibreglass strip disc for cleaning without removing any material or weakening the workpiece.



B-53936

125 mm fiberglass flap disc for material removal and surface preparation

Check video





XGT

GA038G

BL MOTOR AFT AWS XPT

40 V max - XGT angle grinder 230 mm

ø 230 mm	1.700 W	6.600 RPM		
Wheel diameter	Output power	No load speed	Soft start	Electric brake

- Automatic-start Wireless System (AWS®) for wireless power-on/off communication between tool and dust extractor (AWS® Transmitter sold separately)
- Anti-restart protection engineered to prevent motor start up when battery is inserted with switch locked on
- Paddle switch with no lock-on for operator convenience

GA038GT201 includes: rapid charger DC40RA, 2x 5,0 Ah battery BL4050F and plastic case
GA038GZ without batteries and charger

XGT

GA005G


BL MOTOR AFT XPT

40 V max - XGT angle grinder 125 mm

ø 125 mm	1.100 W	8.500 RPM		
Wheel diameter	Output power	No load speed	Soft start	Electric brake

- Active Feedback-sensing Technology (AFT®) turns the motor off if rotation of the wheel is suddenly forced to stop
- Anti-restart protection engineered to prevent motor start up when battery is inserted with switch locked on
- Slide switch with lock-on for operator convenience

GA005GM201 includes: rapid charger DC40RA, 2x 4,0 Ah battery BL4040 and Makpac 4
GA005GZ without batteries and charger

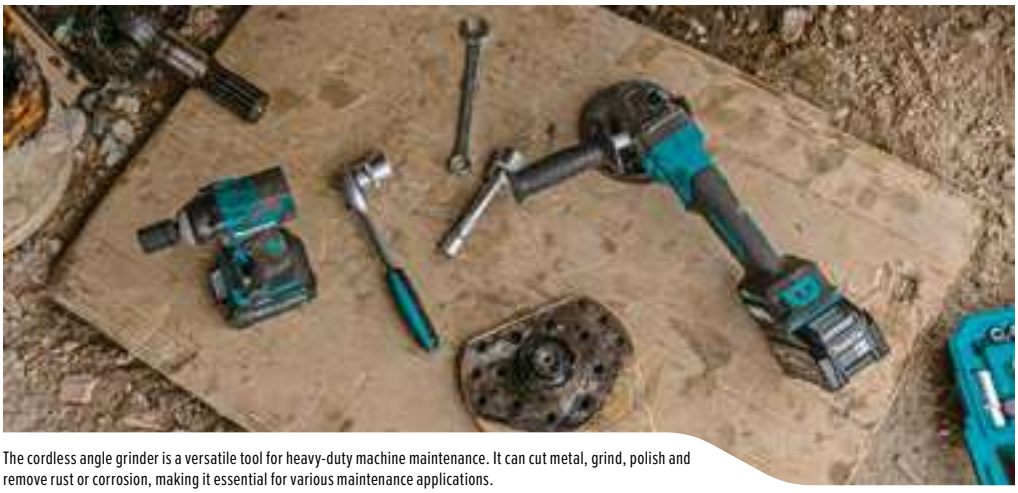

The cordless angle grinder is a versatile tool for heavy-duty machine maintenance. It can cut metal, grind, polish and remove rust or corrosion, making it essential for various maintenance applications.

LXT range



DGA900
18 + 18 V - LXT angle grinder
230 mm, 6.600 min^{-1}



DGA504
18 V - LXT angle grinder
125 mm, 8.500 min^{-1}



DMC300
18 V - LXT compact cut-off
76 mm, 20.000 min^{-1}

Check video





XGT

GD001G

BL MOTOR AFT XPT

40 V max - XGT die grinder

ø 6 mm	29.000 RPM			
Collet size	No load speed	Speed dial	Electric brake	LED job light

- Compact barrel grip designand low weight for easy handling
- Vent slots designed to direct exhaust air away from the user
- Stepped neck for working in tights spaces
- Slide switch with lock-on and speed dial for operator convenience

GD001GZ without batteries and charger

LXT

DBS180

BL MOTOR XPT

18 V - LXT belt sander

533 mm	9 mm	135°	1.700 m/min	
Belt length	Belt width	Arm pivot	Belt speed	Speed dial

- L.E.D. light adjusts to match the angle of the sanding arm or the shape of the workspace
- Versatile for both wood and metal applications
- Variable speed control dial (600 – 1.700 m/min) to match speed to the application
- Two optional arm assemblies (6 mm and 13 mm) available for increased versatility

DBS180Z without batteries and charger



A die grinder is vital in machinery maintenance, used to smooth welds, remove rust, and prep surfaces. Its compact, high-speed design is ideal for tight spaces and detailed work.



Perfect for servicing heavy duty equipment, the 9 mm belt sander delivers powerful material removal in hard-to-reach areas. Ideal for cleaning welds, removing rust, and prepping narrow surfaces.

LXT range



DGD800

18 V - LXT die grinder

6 mm, 26.000 min^{-1}

Accessories for die grinder



B-52722

ø 10 x 20 mm, diamond-cut bit for removing burrs on metal and stainless steel



B-52750

ø 10 x 20 mm, diamond-cut bit for removing burrs on metal, stainless steel and aluminum



B-52788

ø 10 x 20 mm, diamond-cut bit for removing burrs on aluminum.



B-52819

ø 10 x 25 mm, diamond-cut bit for cleaning weld seams between steel plates, suitable for metal and stainless steel



B-36918

ø 50,8 x 38,1 mm – 40 grit flap wheel,



B-36974

ø 50,8 x 50,8 mm – 60 grit flap wheel

Accessories for belt sander



Sanding belt 9 x 533 mm

P-43256 – 40 grit
P-43262 – 60 grit
P-43278 – 80 grit
P-43284 – 100 grit
P-43290 – 120 grit

Accessories for driver drill and impact driver



D-30564

170-piece HSS-TiN coated drill bit set for metal, ø 1–10 mm



E-07032

27-piece drilling and fastening set: includes HSS-TiN metal bits, masonry bits and wood bits — all ø 3–10 mm. Also includes 25 mm screwdriver bits (PH, SL, PZ, H, T) with 60 mm bit holder



Torsion screw bit

Impact premier – PH (1/2/3), PZ (1/2/3), T (10/15/20/25/30/40)



Double ended torsion screw bit

Impact premier – PH2, PZ2



Tilt socket adapter

Impact premier – 1/2" and 3/8" drive



Torsion bit holder

Impact premier – 68/150 mm



Ultra mag torsion bit holder

Impact premier – 79 mm



Torsion nutsetter

Impact premier – 6/8/10/13 mm



Tilt socket bit

Impact premier – 13/15/17/19/21 mm

Check video





XGT

DF002G

BL MOTOR XPT

40 V max - XGT driver drill

ø 38 mm	ø 13 mm	64/30 Nm	1 - 5 Nm	1,5 - 13 mm
Capacity wood	Capacity metal	Fastening torque	Clutch setting	Chuck capacity

- Metal gear design and reinforced housing for maximum durability on the job site
- Compact and ergonomic design at only 164 mm
- 2 speed settings 0 - 550/2,200 min^{-1}

DF002GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 2
DF002GZ without batteries and charger

XGT

TD004G

BL MOTOR XPT

40 V max - XGT impact driver

230 Nm				
Fastening torque	No. of speeds	T-mode (thin metal)	Quick bit installation	LED job light

- 4-stage impact power and T-Mode (for thin metal) to minimize screw stripping when a self-drilling screw is tightened into a thin metal sheet workpiece under light load.
- Compact length at only 136 mm ideal for working in tight spaces
- Equipped with an electric brake and anti-restart function for safe operation

TD004GD201 includes: rapid charger DC40RA, 2x 2,5 Ah battery BL4025 and Makpac 2
TD004GZ without batteries and charger





Driver drills combine speed, power, and versatility to handle a wide range of service and repair tasks efficiently. From removing or securing fasteners during inspection, repair or part replacement to drilling into metal and composite parts.

LXT range



DDF492
18 V - LXT driver drill
50 mm, 13 mm, 140 Nm



DTD173
18 V - LXT impact driver
1/4", 180 Nm



DTL061
18 V - LXT angle impact driver
1/4", 60 Nm





LXT

DRV250

BL MOTOR XPT

18 V - LXT rivet gun

ø 6,4 mm	20.000 N	30 mm		
Rivet diameter	Pulling force	Stroke	Mandrel container	LED job light

- Installs rivets from 2,4 to 6,4 mm
- 30 mm stroke sets most rivets in one stroke
- Tool holds rivet in place, allowing operation in any orientation
- Suitable for aluminium, steel, and stainless steel rivets
- Transparent mandrel catch container for easy viewing of fill level

DRV250Z without batteries and charger

LXT

DCG180

18 V - LXT caulking gun

0 - 28 mm/s	5.000 N	360°		
Dispersing speed	Dispersing force	Rotatable cartridge	Speed dial	Drip stop

- 5 speed dial optimizes flow rate from 0 - 28 mm/sec.
- Drip-reduction feature automatically relieves pressure on the material when trigger is released to prevent unintentional dispensing
- Overload indicator light notifies the operator when tool is nearly overloaded to minimize breakage of the sealant cartridge

DCG180Z with 300 ml holder, without batteries and charger
DCG180ZB with 600 ml cartridge, without batteries and charger



Ideal for securing panels, fenders, and guards on heavy-duty machinery. Rivets offer a strong, reliable bond that resists vibration and harsh conditions.



A caulking gun applies sealants and adhesives cleanly and efficiently, sealing panels, windows, and enclosures against water and dirt while also cushioning components to reduce vibration and noise.

LXT range



DRV150
18 V - LXT rivet gun
4,8 mm, 10.000 N, 25 mm

Accessories for rivet gun



199730-9
Jaws – 6,4 mm



Nose piece, jaw pusher and pipe set
191F80-4 – 4,0 mm
191F79-9 – 4,8 mm
199725-2 – 6,0 mm
191F78-1 – 6,4 mm



191D57-7
Molybdenum Disulfide Grease – 5 g

Accessories for caulking gun



196351-8
300 ml cartrige holder



191P89-6
400 ml cartridge style, sausage style and bulk caulks and adhesives



1911T4-0
600 ml cartridge style, sausage style and bulk caulks and adhesives

Accessories for random orbit sander and orbital sander



Net type abrasive disc ø 150 mm

Exceptional dust extraction and consistent finish — ideal for high-performance sanding. *Use with a pad saver for maximum durability:

D-78710 – 80 grit (10/1)
D-78726 – 120 grit (10/1)
D-78732 – 180 grit (10/1)
D-78748 – 240 grit (10/1)
D-78754 – 320 grit (10/1)



Net type abrasive delta paper 100 x 150 mm

Exceptional dust extraction and consistent finish — ideal for high-performance sanding. *Use with a pad saver for maximum durability:

D-78900 – 120 grit (10/1)
D-78916 – 180 grit (10/1)
D-78922 – 240 grit (10/1)
D-78938 – 320 grit (10/1)



D-78760

Pad saver ø 150 mm (2/1)



D-78944

Delta pad saver 100 x 150 mm (2/1)



1914H8-6

Comfortable backpack for carrying the battery with effortless mobility

Check video



XGT

BO002CG

BL MOTOR AWS XPT

40 V max - XGT random orbit sander

ø 150 mm	5 mm		1,6 m	
Abrasive disc	Orbit diameter	Hook & loop	Connector cord	Speed dial

- 5-speed variable speed control dial lets the operator match pad speed from 6,000 to 10,000 min^{-1} to the application for smooth, refined finish sanding
- Ultra low profile design with superior ergonomics and up to 41% less vibration
- Smooth soft start with constant speed control is capable of handling demanding sanding applications

BO002CGZ without batteries and charger

Check video



XGT

BO006CG

BL MOTOR AWS XPT

40 V max - XGT orbital sander

100x150 mm	3 mm		1,6 m	
Abrasive disc	Orbit diameter	Hook & loop	Connector cord	Speed dial

- 5-speed variable speed control dial lets the operator match pad speed from 6,000 to 10,000 min^{-1} to the application for smooth, refined finish sanding
- Ultra low profile design with superior ergonomics and up to 41% less vibration
- Smooth soft start with constant speed control is capable of handling demanding sanding applications

BO006CGZ without batteries and charger



Built for demanding industrial maintenance, these sanders combine robust performance with refined control. Whether smoothing weld seams or prepping metal surfaces, their low-vibration design, variable speed, and ergonomic form ensure precision, comfort and reliability — even in the toughest environments.

Check video



CL001G

40 V max - XGT cleaner

21 kPa	125 W	730 ml		54 dB
Sealed suction	Suction power	Dust capacity	Speed dial	Low noise

- Capsule type cleaner for quick debris disposal
- 4-speed options for power and run time management
- L.E.D. light for improved visibility and also functions as low battery charge indicator
- Compact and ergonomic design for operator comfort

CL001GZ without batteries and charger



Compact, portable vacuum cleaners are ideal for maintaining your equipment clean for reliable and safer operation.

Check video



VC013GL / VC014GL

40 V max - XGT portable vacuum cleaner

15 kPa	165 W	7,5/4,5 l		
Sealed suction	Suction power	Dry / wet capacity	HEPA filter	Variable suction power

- Filter cleaning system is designed to maintain optimum suction power and longer filter life
- On-board hose and nozzle storage allow for easy and convenient transport
- Two tools in one; quickly converts from vacuum to blower for increased versatility

VC013GLZ01 with AWS system, without batteries and chargers
VC014GLZ without AWS system, batteries and charger



LXT range



DCL184
18 V - LXT cleaner
5,4 kPa, 38 W, 500/330 ml



DVC750L
18 V - LXT portable vacuum cleaner
6,7 kPa, 50 W, 7,5/4,5 l

Accessories for cleaner



199966-0
Easy shake off filter



199989-8
HEPA filter

Accessories for portable vacuum cleaner



199827-4
Pre filter set for dry vacuuming



1915T4-4
Filter set for wet vacuuming



195432-5
High quality poly dust bag – 45 l (10/1)



1915T3-6
Filter dust bag (10/1)



1915W5-3
Paper dust bag (10/1)



1915G5-1
4 caster wheels



199486-4
Shoulder belt

Accessories for polisher/scruber



1914T0-6

Soft brush for cleaning wooden floors



1914T1-4

Medium brush for cleaning general interior floors



1914T2-2

Hard brush for cleaning concrete floors and grease stains



1914T3-0

Hard abrasive brush for cleaning tiled floors



1914S4-1

Pad holder - hook and loop

1914S5-9

Fine floor pad for wax polishing



1914S6-7

Smooth floor pad for wax polishing



1914S7-5

Medium floor pad for wax cleaning



1914S8-3

Rough floor pad for wax removal



1914S9-1

Coarse floor pad for wax removal

Check video



XGT

PS001G

BL MOTOR XPT

40 V max - XGT polisher/scrubber

ø 200 mm	ø 190 mm	354 mm		
Floor pad	Brush pad	Telescoping handle	Speed dial	Quick pad change

- 3-speed selection (150/350/650 min $^{-1}$) allows the user to adjust the speed to the application for polishing, cleaning and wax removal
- Adjustable head with selectable fixed or free-moving operation
- Removable splash guard prevents water or cleaning agent from splashing during use
- Easy installation or removal of the brush or floor pad without direct contact

PS001GZ without batteries and charger



The polisher/scrubber is built for heavy-duty maintenance, ideal for cleaning large machines and surrounding floor surfaces. Its rugged design ensures reliable performance in demanding industrial settings.

Check video



XGT

VS001G

BL MOTOR HEPA filter XPT

40 V max - XGT vacuum sweeper

650 mm	20 mm	24 l		
Sweeping width	Brush height adjustment	Debris container	HEPA filter	Quiet mode

- 3-brush design engineered for cleaning a variety of dust and waste materials
- Dual suction modes, Standard Mode for cleaning large amounts of dust and waste, and Quiet mode ideal for cleaning indoors and in smaller areas
- Side brush height adjustment dial with on/off lever
- Automatic self-cleaning filtration system maintaining optimal suction and longer filter life

VS001GZ without batteries and charger



Cordless vacuum sweeper ensures reliable performance even in demanding environments, combining HEPA filtration, two main brushes and a side brush, plus compact storage for effortless thorough cleaning.

Check video



XGT

HW001G

BL MOTOR XPT

40 V max - XGT high-pressure washer

8,5 MPa	5,5 l/min	5 m	1 m	
Pressure	Water flow	Hose length	Suction height	Self priming function

- Adjustable pressure function with three modes
- Option to supply water from a tap or by pumping from a reservoir
- Two battery connections, with automatic switching to the second battery for longer operation
- Compact trolley design for easy portability and transport.

HW001GZ without batteries and charger



The high-pressure washer is perfect for heavy-duty machinery, delivering robust cleaning performance with the flexibility to supply water from a faucet or a separate water reservoir.

Accessories for high-pressure washer



197842-2 ● Trigger gun



1912Y4-1 ○ Variospray nozzle



122F21-9 ● Variospray nozzle with extension



1912Y6-7 ○ Variospray lance



197824-4 ● Cyclone jet nozzle



197864-2 ○ Brush for upgrade cyclone jez nozzle



197870-7 ○ Extension pipe (0,9 m/ 1,3 m/1,7 m)

● Supplied ○ Optional



197831-7 ● Rotary brush



197828-6 ● Wash brush



1912Y2-5 ○ Foam nozzle with container



126766-5 (5 m) ● High pressure hose



197845-6 (5 m) ○
197847-2 (8 m) ○
197850-3 (10 m) ○
High pressure hose extension



197837-5 (10 m) ○
197840-6 (15 m) ○
Drain & gutter hose



197867-6 ○ Anti twist adapter



1910R2-4 ○ Hose with filter for the water supply from the tank
(use with hose 1910R1-6)



1910R1-6 ○ Hose with quick couplings and non-return valve – 3 m



197873-1 ○ Hose with filter for the water supply from the tank



197881-2 ● Absorption connector with filter



197883-8 ● Quick-coupling (non-return valve)



127104-4 ○ Water tank 50 l

MAKTRAK™

THE NEXT GENERATION IN MODULAR STORAGE SYSTEMS

Introducing the next generation in modular storage systems - Makita MAKTRAK. The smart storage solution of tool boxes and organisers with stackable design, easier access and improved loading/unloading into a truck bed or van.

MAKTRAK tool boxes keep your tools secure and easily accessible. Their dual hinged lids allow access from both sides, without unstacking the boxes, while the innovativet horizontal design means they will accomodate larger tools like nailers, saws and rotary hammers.

MAKTRAK organisers are built to keep your workspace efficient and within reach. You can choose from deep medium, low profile medium and deep compact organisers, each designed with maximum durability and storage efficiency in mind.

Transport



Premium handle with Gecko Grips™ provides efficient truck/van loading and unloading.

Access



Horizontal dual-hinged lid allows access to any case without unstacking or interference from the handle.

Store



Horizontal design provides wider interior space for larger tools and accessories.

Organise




Customisable with lid mounting points, panel dividers, bins and battery/ charger storage trays.

BUILD YOUR OWN

MIX AND MATCH STACK AND STORE

Trak connection works in both directions, providing a strong and secure link while offering a quick disconnection via a lever.

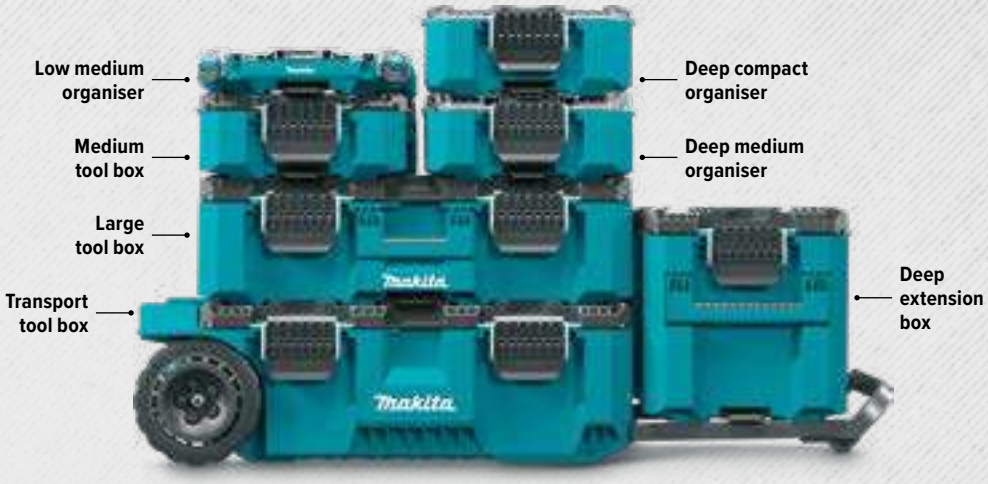



P-91001

Transport tool box - 81,9 l

- Spacious and robust design with dimensions of 1.011 × 565 × 295 mm
- Max load capacity of 113 kg suitable for heavy-duty tools and equipment
- Dual hinged lid allows convenient access from both sides
- Secure latch locking system with padlock compatibility for added protection
- Removable storage tray keeps small parts and tools organised
- Durable handle extends up to 387 mm for easy transport
- Heavy-duty construction with a weight of 17,44 kg for long-lasting use



P-91017

Large tool box - 63 l

- Compact and sturdy design with dimensions of 802 × 565 × 252 mm
- Max load capacity of 45 kg suitable for medium-duty storage needs
- Dual hinged lid offers easy access from either side
- Secure latch locking system with option for padlock use
- Large removable storage tray for organising tools and accessories
- Built to last with a durable 10,11 kg construction



P-91023

Deep extension box - 58,4 l

- Compact vertical design with dimensions of 394 × 565 × 402 mm
- Max load capacity of 45 kg suitable for various storage applications
- Dual hinged lid provides convenient top access
- Secure latch locking system with padlock compatibility for added safety
- Lightweight yet durable with a total weight of 7,21 kg



P-91039

Medium tool box - 18,4 l

- Low-profile and compact design with dimensions of 387 × 562 × 161 mm
- Max load capacity of 34 kg ideal for smaller tools and components
- Secure latch locking system with padlock compatibility for extra protection
- Durable and lightweight build with a total weight of 4,45 kg



P-91045

Deep medium organiser - 18,4 l

- Compact design with dimensions of 387 × 562 × 163 mm
- Max load capacity of 22,6 kg suitable for light to medium-duty storage
- Clear lid for easy overview with ribbed design that secures bins in place
- Secure latch locking system with padlock compatibility
- Durable construction with a total weight of 4,87 kg



P-91051

Low medium organiser - 8,4 l

- Slim and space-saving design with dimensions of 387 × 596 × 85 mm
- Clear lid for easy overview with ribbed design that secures bins in place
- Secure latch locking system with padlock compatibility
- Lightweight build at just 2,89 kg



P-91067

Deep compact organiser - 8,55 l

- Ultra-compact format with dimensions of 278 × 389 × 162 mm
- Clear lid for easy overview with ribbed design that secures bins in place
- Secure latch locking system with padlock compatibility
- Easy to carry with a weight of only 2,59 kg

Interlocking cases and transportation



821549-5

MAKPAC 1 interlock case
395 x 295 x 105 mm



821550-0

MAKPAC 2 interlock case
395 x 295 x 155 mm



821551-8

MAKPAC 3 interlock case
395 x 295 x 215 mm



821552-6

MAKPAC 4 interlock case
395 x 295 x 315 mm



TR00000001

MAKPAC trolley

Check video



XGT

ML007G

40 V max - XGT L.E.D. flashlight / spotlight

1.200 lm	82.000 lx	5.000 K	90°	4
Luminous flux	Illuminance	Color temperature	Pivoting range	Lightning modes

- 4-mode operation: delivering 600 lumens on Spot, 1.000 lumens on Flood, 1.200 lumens on Spot/Flood and Strobe mode

ML007G without batteries and charger



XGT

ML012G

40 V max - XGT L.E.D. bar light

1.700 lm	2.000 lx	5.000 K	3	180° / 90°
Luminous flux	Illuminance	Color temperature	Lightning modes	Pivoting range

- The LED light bar section folds in half for double-sided illumination and compact storage or transport

ML012G without batteries and charger

Check video



LXT

DML814

18 V - LXT L.E.D. worklight

3.000 lm	1.250 lx	90° / 115°	2.2 m / 1.2 m	5.000 K
Luminous flux	Illuminance	Pivoting range	Height adjustment	Color temperature

- 4-mode operation: delivering 600 lumens on Spot, 1.000 lumens on Flood, 1.250 lumens on Spot/Flood and Strobe mode

DML814 without batteries and charger

Check video



LXT

DML818

18 V - LXT L.E.D. bar light

1.700 lm	2.000 lx	5.000 K	3	180° / 90°
Luminous flux	Illuminance	Color temperature	Lightning modes	Pivoting range

- The LED light bar section folds in half for double-sided illumination and compact storage or transport

DML818 without batteries and charger



XGT

191J81-6 **2,5 Ah**

40 V max - XGT power set

- 2x XGT® 2,5 Ah batteries BL4025
- XGT® rapid charger DC40RA with dual-fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges a 40 V max - XGT® 2,5 Ah battery in 28 minutes
- MAKPAC 1 interlock case



XGT

191U13-9 **5,0 Ah**

40 V max - XGT power set

- 2x XGT® 5,0 Ah batteries BL4050F
- XGT® dual port rapid charger DC40RB with three fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges a two 40 V max - XGT® 5,0 Ah battery in 50 minutes
- MAKPAC 3 interlock case



LXT

191U13-9 **6,0 Ah**

40 V max - XGT power set

- 2x LXT® 6,0 Ah batteries BL1860B
- LXT® dual port rapid charger DC18RD with two fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges a two 18 V - LXT® 6,0 Ah battery in 55 minutes
- MAKPAC 3 interlock case



ADP10 (191C10-7)

18 V LXT® adapter for XGT® chargers

- Adapts 40 V max XGT® chargers to charge 18V LXT® batteries
- Charges an 18 V LXT® 6,0 Ah battery in only 40 minutes

CHARGE XGT® & LXT® BATTERIES

Use adapter ADP10 with XGT chargers to rapid charge the 18 V LXT® batteries





MAKITA d.o.o.
Brnčičeva 17
1231 Ljubljana–Črnuče / Slovenija
+386 (0) 59 083 600
info@makita.si



POWER & PRECISION

FOR HEAVY-DUTY MAINTENANCE

40 V max - XGT®

TW010G **LONG ANVIL IMPACT DRIVER**
GP001G **GREASE GUN**